


# CREATIX POLYMEDIA

## SIERRA VOICE PNP 28.8 (INTERNAL REV.2)

<b>Card Type</b>	Fax, Modem (asynchronous), Voice
<b>Chip Set</b>	Sierra
<b>I/O Options</b>	Voice
<b>Maximum Data Rate</b>	28.8Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I & II
<b>Data Modulation Protocol</b>	Bell 103A/212A
<b>Fax Modulation Protocol</b>	ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34
<b>Error Correction/Compression</b>	ITU-T V.17, V.21CH2, V.27ter, V.29 MNP5, V.42, V.42bis

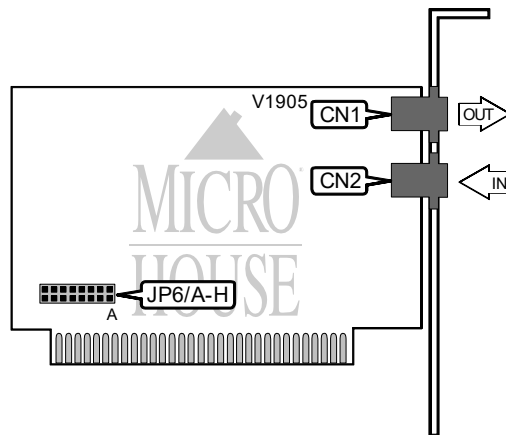

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Line in	CN2

SERIAL PORT ADDRESS		
Setting	JP6/A	JP6/B
COM1 (3F8h)	Open	Open
COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed

INTERRUPT						
Setting	JP6/C	JP6/D	JP6/E	JP6/F	JP6/G	JP6/H
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open
11	Open	Open	Open	Open	Closed	Open
12	Open	Open	Open	Open	Open	Closed

## Proprietary AT Command Set

See document V1896 for a full command summary.