


STANDARD MICROSYSTEMS CORPORATION
ELITE16

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type AUI transceiver via DB-15 port
RG58A/U 50ohm coaxial
Boot ROM Available

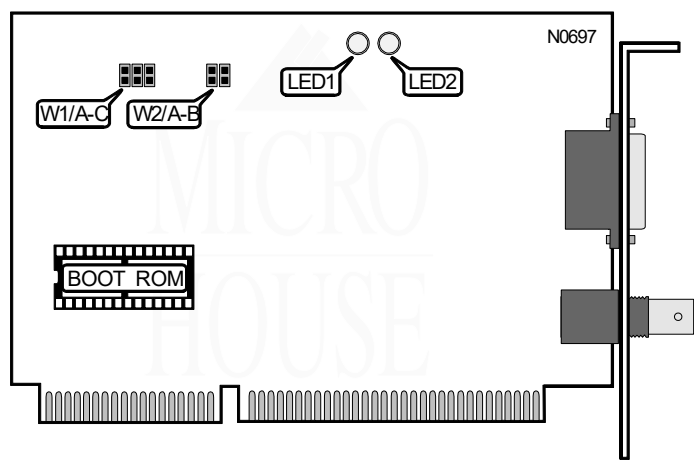

ADDRESS SELECT					
I/O Address	Memory Address	IRQ	W1/A	W1/B	W1/C
1280h	D000h	IRQ3	Open	Closed	Open
240h	Software configured	Software configured	Closed	Open	Open
300h	CC00h	IRQ10	Open	Open	Closed

BOOT ROM		
Setting	W1/A	W1/B
Disabled	Closed	Open
Enabled	Open	Closed

DIAGNOSTIC LED			
LED	Color	Status	Condition
LED1	Orange	On	Data is being transmitted
LED1	Orange	Off	Data is not being transmitted
LED2	Orange	On	Data is being received
LED2	Orange	Off	Data is not being received