


# SUPRA DIAMOND

## SUPRAFAX MODEM 144I

<b>Card Type</b>	Fax, Modem (asynchronous)
<b>Chip Set</b>	Rockwell
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I & II
<b>Data Modulation Protocol</b>	Bell 103/212A
<b>Fax Modulation Protocol</b>	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Error</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Correction/Compression</b>	MNP5, MNP10, V.42, V.42bis

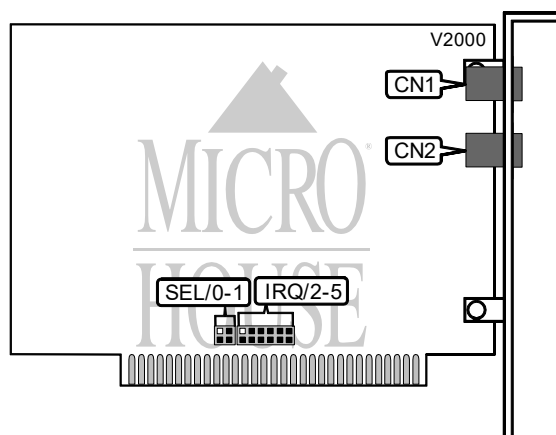

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SERIAL PORT ADDRESS		
Setting	SEL/0	SEL/1
COM1 (3F8h)	Open	Open
i COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed

INTERRUPT SELECTION				
Setting	IRQ/2	IRQ/3	IRQ/4	IRQ/5
2	Closed	Open	Open	Open
i 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

## Proprietary AT Command Set

See document V1998 for a full command summary.