


STANDARD MICROSYSTEMS CORPORATION
ELITE10T

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type Unshielded twisted pair
AUI transceiver via DB-15 port
Boot ROM Available

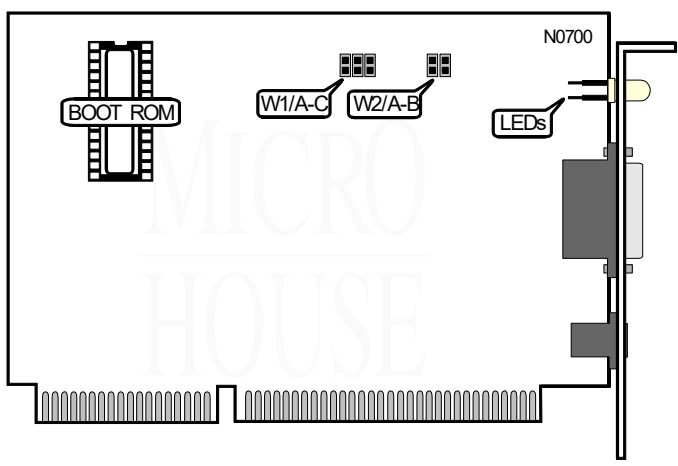


ADDRESS SELECT					
Base Address	Memory Address	IRQ	W1/A	W1/B	W1/C
280h	D0000h	IRQ3	Open	Closed	Open
240h	CC000h	IRQ2 disabled	Closed	Open	Open
300h	CA000h	IRQ5	Open	Open	Closed

BOOT ROM		
Setting	W2/A	W2/E
Disabled	Closed	Open
Enabled	Open	Closed

Continued on next page . . .

STANDARD MICROSYSTEMS CORPORATION
ELITE10T

... continued from previous page



DIAGNOSTIC LED			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Off	Network connection is broken
LED2	Yellow	On	Data is being transmitted
LED2	Yellow	Off	Data is not being transmitted
LED3	Green	On	Data is being received
LED3	Green	Off	Data is not being received