
SIIG, INC. CYBERPRO DUAL I/O

Card TypeSerialChip SetUnidentifiedI/O OptionsSerial ports (2)Data Bus16-bit ISA

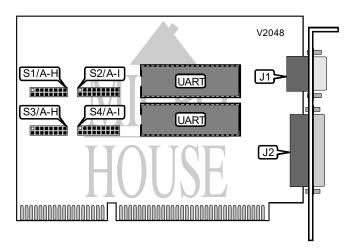

CONNECTIONS							
Function Label Function Label							
Serial port 1	J1	Serial port 2	J2				

SERIAL PORT 1 ADDRESS										
Setting	S1/A	S1/B	S1/C	S1/E	S1/F	S1/G	S1/H			
í COM1: (3F8h)	Closed	Open								
COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open		
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open		
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open		
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open		
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open		
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open		
COM8: (260h)	Open	Closed								
Disabled	Open									

SERIAL PORT 2 ADDRESS										
Setting	g S3/A S3/B S3/C S3/D S3/E S3/F S3/G									
COM1: (3F8h)	Closed	Open								
í COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open		
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open		
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open		
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open		
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open		
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open		
COM8: (260h)	Open	Open	Open	Open	Open	Open	Open	Closed		
Disabled	Open	Open	Open	Open	Open	Open	Open	Open		

Continued on next page. . .

SIIG, INC. CYBERPRO DUAL I/O

. . . continued from previous page

SERIAL PORT 1 INTERRUPT										
Setting	S2/A	S2/B	S2/C	S2/D	S2/E	S2/F	S2/G	S2/H	S2/I	
IRQ2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open	
IRQ3	Closed	Open								
í IRQ4	Open	Closed	Open							
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open	
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	
IRQ12	Open	Closed	Open							
IRQ15	Open	Closed								
Disabled	Open									

SERIAL PORT 2 INTERRUPT										
Setting	S4/A	S4/B	S4/C	S4/D	S4/E	S4/F	S4/G	S4/H	S4/I	
IRQ2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open	
í IRQ3	Closed	Open								
IRQ4	Open	Closed	Open							
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open	
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	
IRQ12	Open	Closed	Open							
IRQ15	Open	Closed								
Disabled	Open									