


STANDARD MICROSYSTEMS CORPORATION

TOKENCARD ELITE SMC8115T

NIC Type	TokenRing
Transfer Rate	4/16Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	Shielded twisted pair via DB-9 port Unshielded twisted pair
Boot ROM	Available

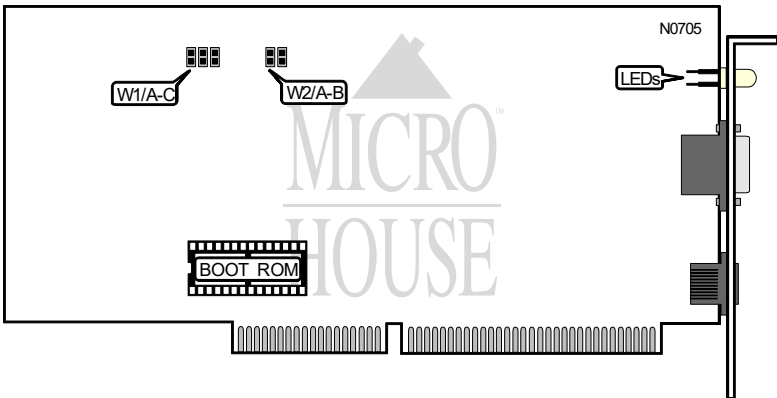


ADDRESS/INTERRUPT CONFIGURATION					
I/C Address	Memory Address	IRQ	W1/A	W1/B	W1/C
240h	CC00h	Disabled	Closed	Open	Open
280h	D000h	IRQ3	Open	Closed	Open
300h	CC00h	IRQ10	Open	Open	Closed

BOOT ROM		
Setting	W1/A	W1/B
Disabled	Closed	Open
Enabled	Open	Closed

Continued on next page . . .

STANDARD MICROSYSTEMS CORPORATION
TOKENCARD ELITE SMC8115T

... continued from previous page



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Loopback testing is in progress
LED1	Green	Off	Loopback testing is not in progress
LED2	Amber	On	Network connection is good
LED2	Amber	Off	Network connection is broken