


STANDARD MICROSYSTEMS CORPORATION

ETHERCARD ELITE16 ULTRA ADAPTER

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus, Star
Wiring Type RG58A/U 50ohm coaxial
Boot ROM Available

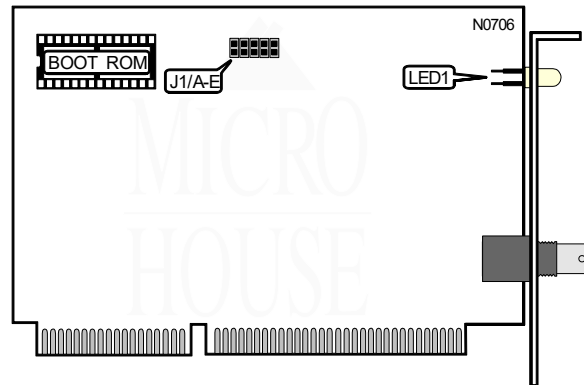

ADDRESS/INTERRUPT CONFIGURATION								
I/O Address	RAM Address	ROM Address	IRQ	W1/A	W1/B	W1/C	W1/D	W1/E
Software	Software	Software	Software	Closed	Open	Open	Open	Open
280h	D000h	None	IRQ3	Open	Closed	Open	Open	Open
300h	CC00h	None	IRQ10	Open	Open	Closed	Open	Open
280h	D000h	D800h	IRQ3	Open	Open	Open	Closed	Open
300h	CC00h	D800h	IRQ10	Open	Open	Open	Open	Closed

Note: The factory default is software configured address and interrupt selection.

DIAGNOSTIC LED			
LED	Color	Status	Condition
LED1	Yellow	Off	Data is not being transmitted/received
LED1	Yellow	On	Data is being transmitted/received