


CARDINAL TECHNOLOGIES, INC

14400BPS V.32 V.42BIS FAX (1/2CARD-VER.1)

| | |
|------------------------------|--|
| Card Type | Modem (asynchronous) |
| Chip Set | Unidentified |
| Maximum Data Rate | 14.4Kbps |
| Maximum Fax Rate | Unidentified |
| Data Bus | 8-bit ISA |
| Fax Class | Class I & II |
| Data Modulation Protocol | Bell 103/212A |
| Fax Modulation Protocol | ITU-T V.21, V.22, V.22bis, V.32, V.32bis |
| Error Correction/Compression | Unidentified |
| | MNP5, V.42, V.42bis |

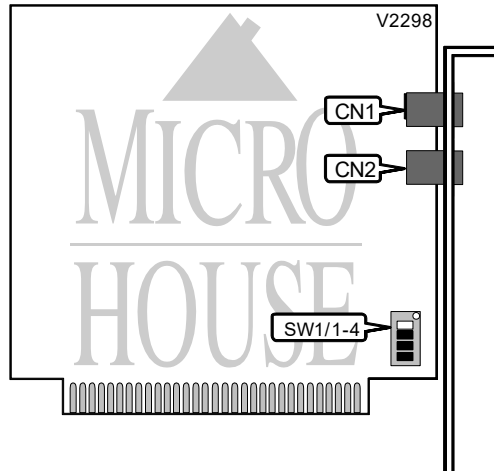

| CONNECTIONS | | | |
|-------------|-------|-------------|-------|
| Function | Label | Function | Label |
| Line out/in | CN1 | Line in/out | CN2 |

| SERIAL PORT ADDRESS | | | |
|---------------------|-------|--|-------|
| Setting | SW1/1 | | SW1/2 |
| COM1 (3F8h) | Off | | Off |
| COM2 (2F8h) | Off | | On |
| COM3 (3E8h) | On | | Off |
| COM4 (2E8h) | On | | On |

| INTERRUPT SELECTION | | | |
|---------------------|-------|--|-------|
| Setting | SW1/3 | | SW1/4 |
| 2 | On | | On |
| 3 | Off | | On |
| 4 | Off | | Off |
| 5 | On | | Off |

Continued on next page . . .

CARDINAL TECHNOLOGIES, INC
14400BPS V.32 V.42BIS FAX (1/2CARD-VER.1)

. . . continued from previous page

| SUPPORTED COMMAND SET |
|---|
| Basic AT Commands |
| AT, 'Comma', A/ |
| A, B, C, E, F, H, L, M, N, O, P, Q, S, T, V, W, X, Y, Z |
| &C, &D, &F, &G, &K, &L, &M, &P, &Q, &R, &S, &T, &U, &V, &W, &Y, &Z |
| Extended AT Commands |
| \A, \B, \C, \G, \J, \O, \U, \V, \X, \Y, \Z |
| %A, %E, %G |
| S Registers |
| S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S25 |
| S26, S27, S30, S37, S95, S108, S109, S110 |
| Special Commands |
| "H, "O, -C, -J, -V |
| Note: Please see MHI Help file for full command documentation. |

Proprietary AT Command Set

For a full command summary, see. CARDINAL TECHNOLOGIES, INC 9600BPS V.32 V.42BIS FAX (1/2CARD-VER.1)