


OLICOM INTERNATIONAL
O C - 3 1 2 1

NIC Type	Token Ring
Transfer Rate	4/16 Mbps
Data Bus	16-bit ISA
Topology	Ring
Wiring Type	AUI Transceiver via DB-15 port Shielded twisted pair Unshielded twisted pair
Boot ROM	Available

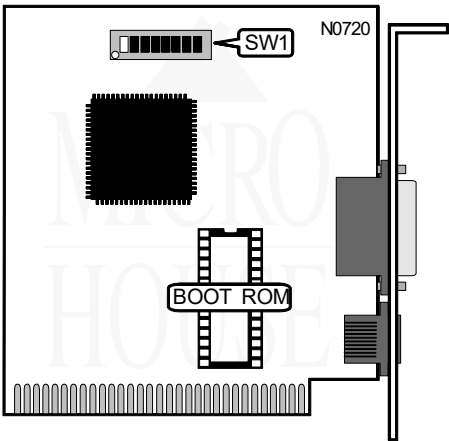

DATA TRANSFER RATE		
Speed	SW1/1	
4Mbps	Off	
16Mbps	On	

I/O ADDRESS SELECT		
Address	SW1/2	SW1/3
A30 - A3Fh	Off	Off
A40 - A4Fh	Off	On
A60 - A6Fh	On	Off
A70 - A7Fh	On	On

INTERRUPT SELECT		
IRQ	SW1/4	SW1/5
IRQ2	Off	Off
IRQ3	On	Off
IRQ5	Off	On
IRQ7	On	On

Continued on next page. . .

OLICOM INTERNATIONAL

O C - 3 1 2 1

...continued from previous page

RPL ADDRESS SELECT			
Address	SW1/6	SW1/7	SW1/8
i Disabled	Off	Off	Off
C6000 - C7FFFh	On	Off	Off
CA000 - CBFFFh	Off	On	Off
CE000 - CFFFFh	On	On	Off
D2000 - D3FFFh	Off	Off	On
D6000 - D7FFFh	On	Off	On
DA000 - DBFFFh	Off	On	On
DE000 - DFFFFh	On	On	On