


CARDINAL TECHNOLOGIES, INC

14400BPS V.32 V.42BIS FAX (1/2CARD-VER.2)

Card Type	Modem (asynchronous)
Chip Set	Unidentified
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	Unidentified
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
Error Correction/Compression	Unidentified
	MNP5, V.42, V.42bis

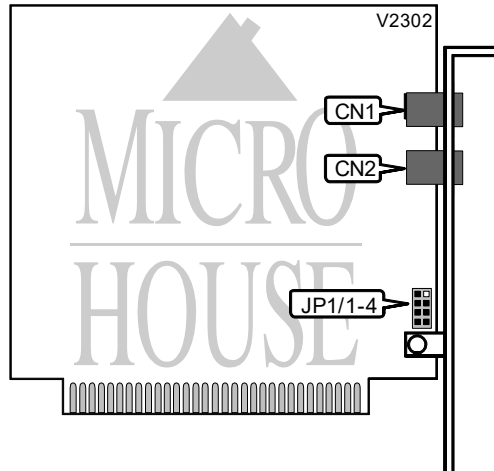

CONNECTIONS			
Function	Label	Function	Label
Line out/in	CN1	Line in/out	CN2

SERIAL PORT ADDRESS			
Setting	JP1/1		JP1/2
COM1 (3F8h)	Off		Off
COM2 (2F8h)	Off		On
COM3 (3E8h)	On		Off
COM4 (2E8h)	On		On

INTERRUPT SELECTION			
Setting	JP1/3		JP1/4
2	On		On
3	Off		On
4	Off		Off
5	On		Off

Continued on next page . . .

CARDINAL TECHNOLOGIES, INC
14400BPS V.32 V.42BIS FAX (1/2CARD-VER.2)

. . . continued from previous page

SUPPORTED COMMAND SET
Basic AT Commands
AT, 'Comma', A/
A, B, C, E, F, H, L, M, N, O, P, Q, S, T, V, W, X, Y, Z
&C, &D, &F, &G, &K, &L, &M, &P, &Q, &R, &S, &T, &U, &V, &W, &Y, &Z
Extended AT Commands
\A, \B, \C, \G, \J, \O, \U, \V, \X, \Y, \Z
%A, %E, %G
S Registers
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S25
S26, S27, S30, S37, S95, S108, S109, S110
Special Commands
"H, "O, -C, -J, -V
Note: Please see MHI Help file for full command documentation.

Proprietary AT Command Set

For a full command summary, see. CARDINAL TECHNOLOGIES, INC 9600BPS V.32 V.42BIS FAX (1/2CARD-VER.1)