


# EVEREX SYSTEMS, INC. EVERCOM II (300 & 1200BPS) EV-920 (VER. F)

|                              |                      |
|------------------------------|----------------------|
| Card Type                    | Modem (asynchronous) |
| Chip Set                     | Unidentified         |
| Maximum Data Rate            | 1200bps              |
| Data Bus                     | 8-bit ISA            |
| Data Modulation Protocol     | Bell 103/212A        |
|                              | ITU-T V.21, V.22     |
| Error Correction/Compression | MNP5, V.42, V.42bis  |

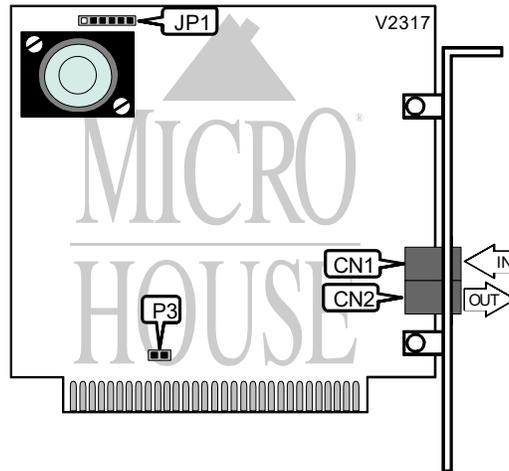

| CONNECTIONS |       |          |       |  |
|-------------|-------|----------|-------|--|
| Function    | Label | Function | Label |  |
| Line in     | CN1   | Line out | CN2   |  |

| SERIAL PORT ADDRESS |                          |
|---------------------|--------------------------|
| Setting             | JP1                      |
| COM1 (3F8h)         | Pins 2 & 3, 5 & 6 closed |
| COM2 (2F8h)         | Pins 1 & 2, 5 & 6 closed |
| COM3 (3E8h)         | Pins 2 & 3, 4 & 5 closed |
| COM4 (2E8h)         | Pins 1 & 2, 4 & 5 closed |

| SLOT INSTALLATION               |        |
|---------------------------------|--------|
| Setting                         | P3     |
| Card installed in IBM XT-slot 8 | Closed |
| Card installed in IBM PC slot   | Open   |
| Card installed in IBM AT slot   | Open   |

| SUPPORTED COMMAND SET  |
|--|
| Basic AT Commands  |
| AT, '+++', 'Comma', A/   |
| A, D, E, F, H, L, M, O, P, Q, S, T, V, X, Z                    |
| S Registers  |
| S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S16     |
| <b>Note:</b> See MHI Help file for full command documentation. |

Continued on next page . . .

EVEREX SYSTEMS,INC.  
EVERCOM II (300 & 1200BPS) EV-920 (VER. F)

*. . . continued from previous page*

**Proprietary AT Command Set**

See EVEREX SYSTEMS, INC., EVERCOM II (300& 1200BPS) EV-920 (VER.1.4)  
for a full command summary.