


# INFORMTECH INTERNATIONAL, INC.

## VL320T

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	16-bit ISA
<b>Topology</b>	Linear bus
<b>Wiring Type</b>	AUI transceiver via DB-15
	RG58A/U 50ohm coaxial
	Unshielded twisted pair
<b>Boot ROM</b>	Available(location unidentified)

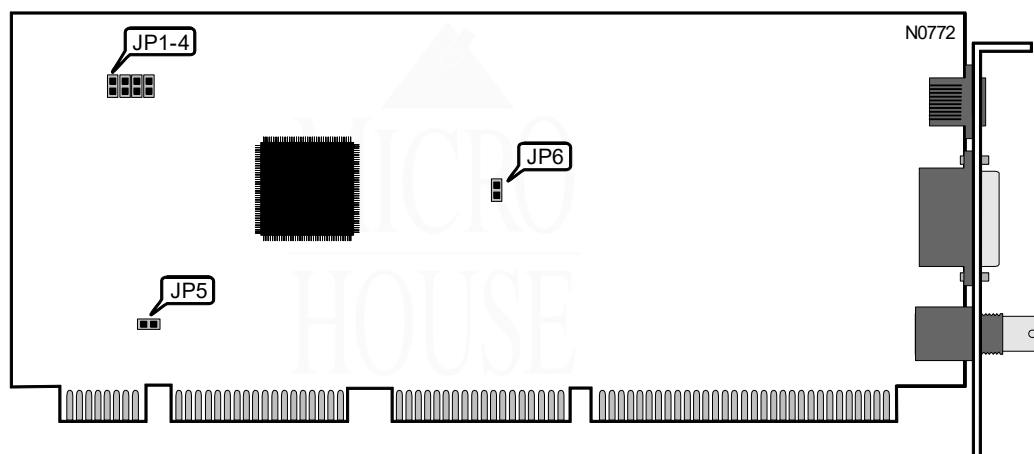

ZERO WAIT STATE	
Setting	JP5
i Enabled	Open
Disabled	Closed

ETHERNET CABLE TYPE SELECT	
Type	JP6
Thick Ethernet	Open
Thin Ethernet	Closed

ADDRESS/INTERRUPT/CABLE TYPE SELECT						
Address	IRQ	Cable Type	JP1	JP2	JP3	JP4
i 300h	IRQ2	Twisted pair	Off	On	On	On
300h	IRQ2	Ethernet	Off	Off	On	On
320h	IRQ10	Twisted pair	Off	On	On	Off
320h	IRQ10	Ethernet	Off	Off	On	Off
340h	IRQ11	Twisted pair	Off	On	Off	On
340h	IRQ11	Ethernet	Off	Off	Off	On
360h	IRQ3	Twisted pair	Off	On	Off	Off