EVEREX SYSTEMS, INC.
S P E E D L I N K / P C 1 6   T P

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear bus
	Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Location Unidentified
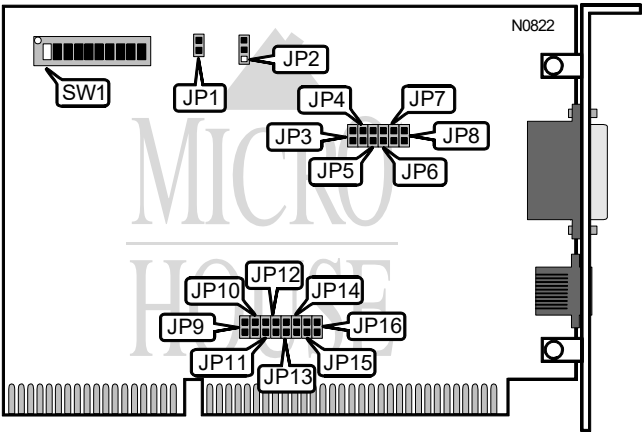
NODE ADDRESS						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
í 360h	On	Off	Off	On	Off	Off
320h	On	Off	On	On	Off	Off
330h	Off	Off	On	On	Off	Off
340h	On	On	Off	On	Off	Off
350h	Off	On	Off	On	Off	Off
380h	On	On	On	Off	Off	Off
390h	Off	On	On	Off	Off	Off
3A0h	On	Off	On	Off	Off	Off

Continued on next page . . .

EVEREX SYSTEMS, INC.
S P E E D L I N K / P C - 1 6 T P

BASE MEMORY ADDRESS				
Address	SW1/7	SW1/8	SW1/9	SW1/10
í C800h	On	On	Off	On
C000h	On	On	On	On
C400h	On	Off	On	On
CC00h	On	Off	Off	On
D000h	On	On	On	Off
D400h	On	Off	On	Off
D800h	On	On	Off	Off
DC00h	On	Off	Off	Off
No prom	-	-	-	-

PERFORMANCE SELECT	
Setting	JP1
í Normal	Open
High	Closed

IOCHRDY	
Setting	JP2
í Normal IOCHRDY	Pins 2 & 3 closed
Early IOCHRDY	Pins 1 & 2 closed

CABLE TYPE SELECT						
Type	JP3	JP4	JP5	JP6	JP7	JP8
í UTP	Closed	Closed	Closed	Closed	Closed	Closed
Standard Ethernet	Open	Open	Open	Open	Open	Open

INTERRUPT SELECT								
IRQ	JP9	JP10	JP11	JP12	JP13	JP14	JP15	JP16
í IRQ2	Closed	Open	Open	Open	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ15	Open	Open	Open	Open	Open	Open	Open	Closed