


CREATIVE LABS, INC. 16-BIT AUDIO CARD

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	CD-ROM interface, CD-ROM audio in (2), game/MIDI port, line in, line out, microphone in, PC speaker, speaker out, Wave Blaster
Data Bus	16-bit ISA
Floppy drives supported	None

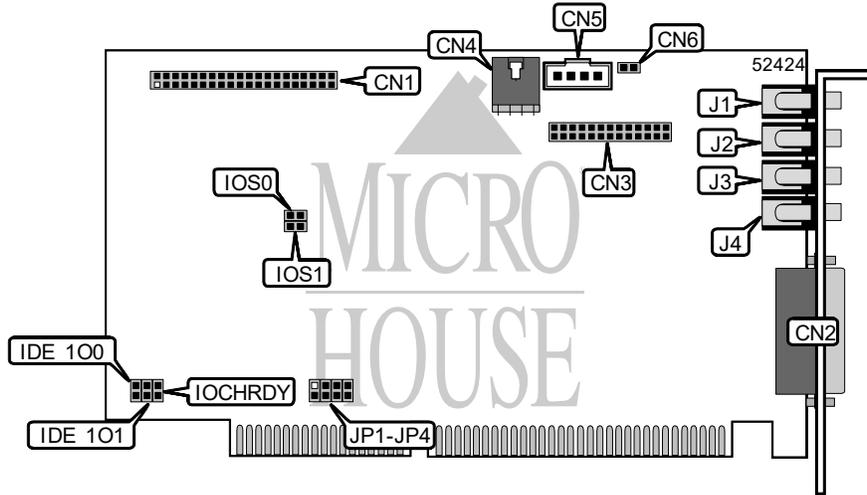

CONNECTIONS			
Function	Label	Function	Label
IDE CD-ROM interface	CN1	PC speaker	CN6
Game/MIDI port	CN2	Line in	J1
Wave Blaster	CN3	Microphone in	J2
CD - audio in	CN4	Line out	J3
CD - audio in	CN5	Speaker out	J4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	IOCHRDY	Unidentified

AUDIO BASE I/O ADDRESS SELECTION		
Address	IOS0	IOS1
í 220h	Closed	Closed
240h	Closed	Open
260h	Open	Closed
280h	Open	Open

IDE ADDRESS CONFIGURATION		
Address	IDE 100	IDE 101
í Secondary	Closed	Open
Tertiary	Open	Closed
Quaternary	Open	Open
Disabled	Closed	Closed

Continued on next page. . .

CREATIVE LABS, INC.
16-BIT AUDIO CARD

. . . continued from previous page

IDE IRQ SELECTION				
IRQ	JP1	JP2	JP3	JP4
10	Closed	Open	Open	Open
11	Open	Closed	Open	Open
12	Open	Open	Closed	Open
15	Open	Open	Open	Closed