


ADVANCED LOGIC RESEARCH, INC.

ALR/ENET

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Not available

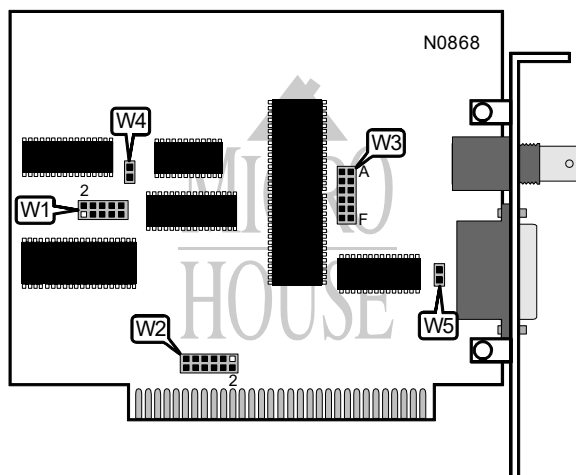

CABLE TYPE	
Type	W3/A-F
RG58A/U 50ohm coaxial	Closed
AUI transceiver via DB-15 port	Open

ETHERNET REVISION	
Revision	W4
Rev. 1	Closed
IEEE (Rev. 2) and RG-58A	Open

SEGMENT LENGTH	
Length	W5
185 meters	Closed
300 meters	Open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE

ADVANCED LOGIC RESEARCH, INC.

ALR/ENET

... continued from previous page.

WAIT STATE CONFIGURATION	
Bus Speed	W1, pins 1 & 2
6MHz	Closed
8-16MHz	Open

INTERRUPT SETTINGS	
IRQ	W2
2	Pins 11 & 12 closed
3	Pins 9 & 10 closed
4	Pins 7 & 8 closed
5	Pins 5 & 6 closed
6	Pins 3 & 4 closed
7	Pins 1 & 2 closed

BASE I/O ADDRESS				
Address	W1, pins 3 & 4	W1, pins 5 & 6	W1, pins 7 & 8	W1, pins 9 & 10
200h	Closed	Closed	Closed	Closed
220h	Open	Closed	Closed	Closed
240h	Closed	Open	Closed	Closed
260h	Open	Open	Closed	Closed
280h	Closed	Closed	Open	Closed
2A0h	Open	Closed	Open	Closed
2C0h	Closed	Open	Open	Closed
2E0h	Open	Open	Open	Closed
300h	Closed	Closed	Closed	Open
320h	Open	Closed	Closed	Open
340h	Closed	Open	Closed	Open
360h	Open	Open	Closed	Open
380h	Closed	Closed	Open	Open
3A0h	Open	Closed	Open	Open
3C0h	Closed	Open	Open	Open
3E0h	Open	Open	Open	Open