


MOTOROLA, INC.

6520/6560 MPROUTER ISDN CARD

Card Type	ISDN TA
Chip Set	Unidentified
Transfer Rate	64Kbps x 2
Data Bus	16-bit ISA
ISDN Protocol	Unidentified
Switch Type	Unidentified

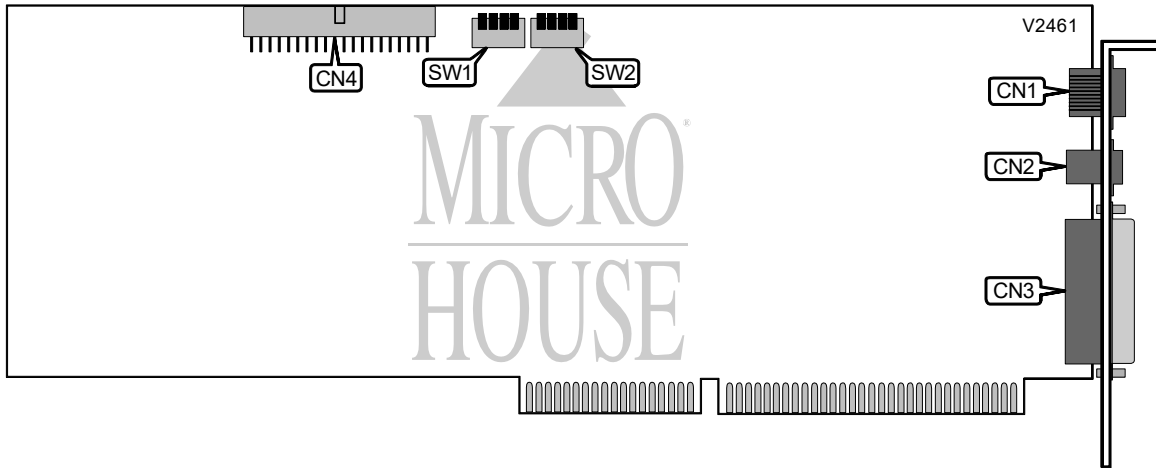

CONNECTIONS			
Function	Label	Function	Label
ISDN line out	CN1	Not used	CN3
Not used	CN2	Unidentified	CN4

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	SW 1/1	On
í Factory configured - do not alter	SW 1/2	On
í Factory configured - do not alter	SW 1/3	On
í Factory configured - do not alter	SW 1/4	On

Continued on next page . . .

MOTOROLA, INC.
6520/6560 MPRouter ISDN CARD

. . . continued from previous page

CARD NUMBER				
Setting	SW2/1	SW2/2	SW2/3	SW2/4
0	On	On	On	On
1	Off	On	On	On
2	On	Off	On	On
3	Off	Off	On	On
4	On	On	Off	On
5	Off	On	Off	On
6	On	Off	Off	On
7	Off	Off	Off	On
8	On	On	On	Off
9	Off	On	On	Off
10	On	Off	On	Off
11	Off	Off	On	Off
12	On	On	Off	Off
13	Off	On	Off	Off
14	On	Off	Off	Off
15	Off	Off	Off	Off

MISCELLANEOUS TECHNICAL NOTE

This card is designed for use in Motorola's 6520/6560 MPRouter system and will not function in another system. See documents M3596 and M3597 for more information.