


# AST RESEARCH, INC.

## RAMPAGE 286 EXPANDED MEMORY CARD

Card Type	Memory card
Chip Set	Unidentified
Maximum Onboard Memory	2MB RAM (Type unidentified)
I/O Options	None
Data Bus	16-bit ISA
Floppy drives supported	None

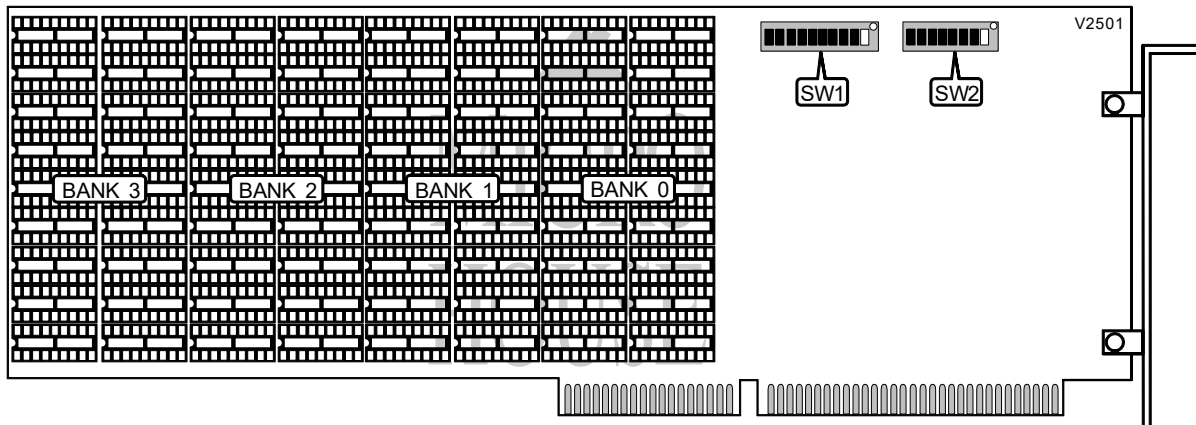

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Dual Page mode enabled	SW1/9	Closed
Dual Page mode disabled	SW1/9	Open
í Factory configured - do not alter	SW1/10	N/A
í Parity checking enabled	SW2/8	Closed
Parity checking disabled	SW2/8	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	None	None	None
1MB	(18) 41256	(18) 41256	None	None
1.5MB	(18) 41256	(18) 41256	(18) 41256	None
2MB	(18) 41256	(18) 41256	(18) 41256	(18) 41256

MEMORY CONFIGURATION							
Size	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
í Conventional	On	On	On	On	On	On	On
Extended	Off	Off	Off	Off	Off	Off	Off

Continued on next page. . .

# AST RESEARCH, INC.

## RAMPAGE 286 EXPANDED MEMORY CARD

... continued from previous page

DRAM SWITCH CONFIGURATION				
Size	SW1/1	SW1/2	SW1/3	SW1/4
128KB	On	On	On	On
256KB	On	On	On	Off
384KB	On	On	Off	On
512KB	On	On	Off	Off
640KB	On	Off	On	On
768KB	On	Off	On	Off
896KB	On	Off	Off	On
1024KB	On	Off	Off	Off
1152KB	Off	On	On	On
1280KB	Off	On	On	Off
1408KB	Off	On	Off	On
1536KB	Off	On	Off	Off
1664KB	Off	Off	On	On
1792KB	Off	Off	On	Off
1920KB	Off	Off	Off	On
2048KB	Off	Off	Off	Off

BASE I/O ADDRESS CONFIGURATION				
Address	SW1/5	SW1/6	SW1/7	SW1/8
0208h	On	On	On	On
0218h	On	On	On	Off
0258h	On	Off	On	Off
0268h	On	Off	Off	On
02A8h	Off	On	Off	On
02B8h	Off	On	Off	Off
02E8h	Off	Off	Off	On