


Chapter 5: Jumper Settings
SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 8 1 - D 2 5 6 - V 1 0

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Not available

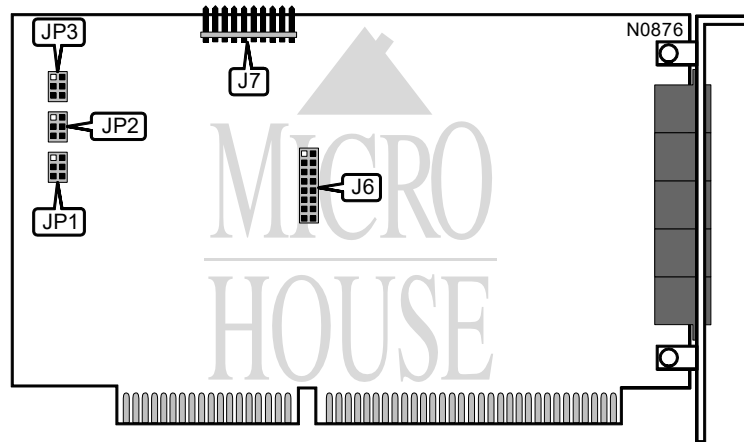

CONNECTIONS	
Connector	Function
J6	Header to AUI port
J7	Inter-repeater bus

BASE I/O ADDRESS SELECTION	
Address	JP1
288h	Pins 1 & 2 closed
248h	Pins 3 & 4 closed
Reserved	Pins 5 & 6 closed

MASTER/SLAVE CONFIGURATION	
Mode	JP2
None (single board)	Open
Master	Pins 1 & 2 closed
Slave 1	Pins 3 & 4 closed
Slave 2	Pins 5 & 6 closed

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Setting
JP3	Open