


DECISION COMPUTER INTERNATIONAL CO., LTD.

PCCOM 8-BIT ISA 8-PORT RJ-11 RS-232/422

Card Type
Chipset
I/O Options
Data Bus

Serial
 GoldStar
 Serial ports (8)
 8-bit ISA

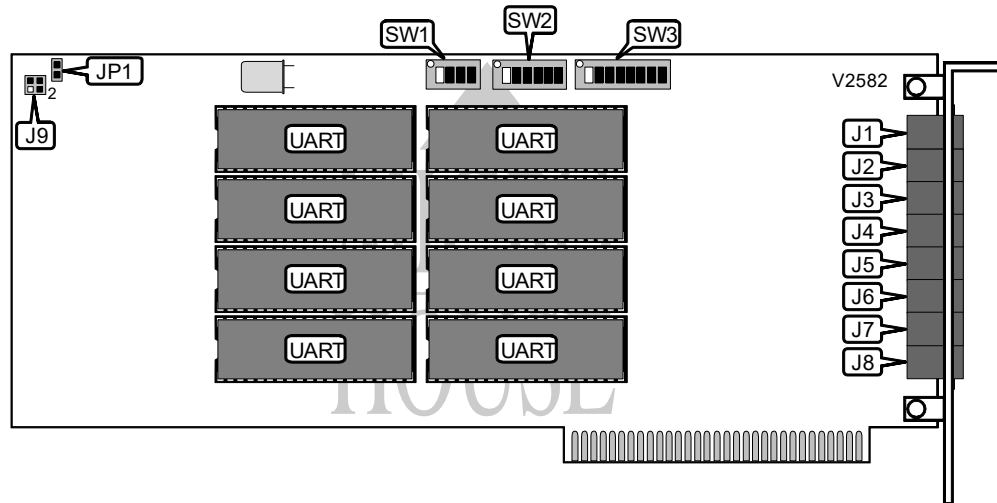

CONNECTIONS			
Function	Label	Function	Label
Serial port 1	J1	Serial port 6	J6
Serial port 2	J2	Serial port 7	J7
Serial port 3	J3	Serial port 8	J8
Serial port 4	J4	Daisy chain connector (see pinout below)	J9
Serial port 5	J5		

J9 PINOUT			
Function	Pin	Function	Pin
Daisy chain out	1	Daisy chain in	3
Daisy chain out	2	Daisy chain in	4

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Interrupt master	JP1	Closed
Interrupt slave	JP1	Open
í Factory configured - do not alter	SW3/7	On
í Interrupt vector enabled	SW3/8	Off
Interrupt vector disabled	SW3/8	On
Note: Only one board per system should be set to interrupt master.		

Continued on next page. . .

DECISION COMPUTER INTERNATIONAL CO., LTD.
PCCOM 8-BIT ISA 8-PORT RJ-11 RS-232/422

. . . continued from previous page

BASE I/O ADDRESS				
Setting	SW1/1	SW1/2	SW1/3	SW1/4
000h	On	On	On	On
040h	On	On	On	Off
080h	On	On	Off	On
0C0h	On	On	Off	Off
100h	On	Off	On	On
140h	On	Off	On	Off
180h	On	Off	Off	On
1C0h	On	Off	Off	Off
200h	Off	On	On	On
240h	Off	On	On	Off
280h	Off	On	Off	On
2C0h	Off	On	Off	Off
300h	Off	Off	On	On
340h	Off	Off	On	Off
380h	Off	Off	Off	On
3C0h	Off	Off	Off	Off

INTERRUPT						
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
IRQ2	On	Off	Off	Off	Off	Off
IRQ3	Off	On	Off	Off	Off	Off
IRQ4	Off	Off	On	Off	Off	Off