


TRENDWARE INTERNATIONAL, INC.  
TE-32E

NIC Type: Ethernet  
Transfer Rate: 10Mbps  
Data Bus: 32-bit EISA  
Topology: Linear bus  
Star  
Wiring Type: AUI transceiver via DB-15 port  
RG-58A/U 50ohm coaxial  
Shielded/Unshielded twisted pair  
Boot ROM: Available

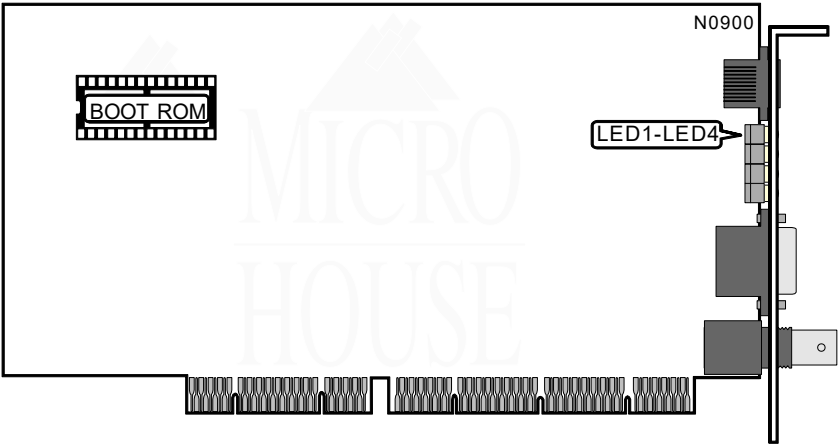

DIAGNOSTIC LEDS		
LED	Status	Condition
LED1	On	Power on
LED1	Blinking	Data is being transmitted
LED2	On	Network connected successfully (UTP connec on only)
LED2	Blinking	Data is being received
LED3	On	Network is not connected (RG-58A/U 50ohm coaxial onnection only)
LED3	Blinking	Collision detected
LED4	Blinking	Transmission interrupted due to packet longer than allowable length (jabber)