


TRENDWARE INTERNATIONAL, INC.
TE-MC

NIC Type: Ethernet
 Transfer Rate: 10Mbps
 Data Bus: 16-bit MCA
 Topology: Linear bus
 Star
 Wiring Type: RG-58A/U 50ohm coaxial
 Shielded/Unshielded twisted pair
 Boot ROM: Available

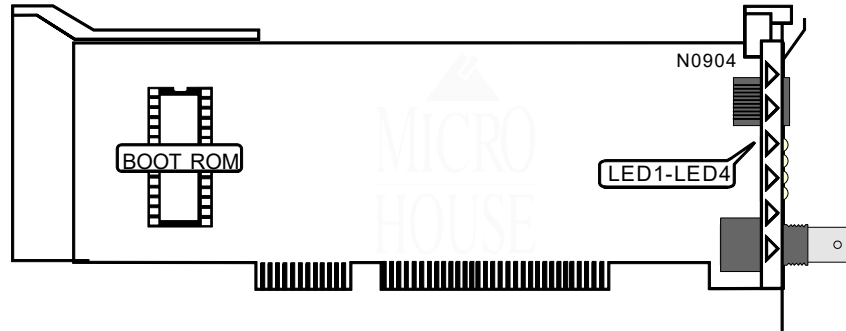

DIAGNOSTIC LEDES		
LED	Status	Condition
LED1	On	Power on
LED1	Blinking	Data is being transmitted (UTP only)
LED2	On	Network connected successfully
LED2	Blinking	Data is being received (UTP only)
LED2	Off	Network is not connected (UTP only)
LED3	On	Collision detected
LED4	On	Network is not connected (RG-58A/U 50ohm coaxial only)
LED4	Blinking	Transmission interrupted due to packet longer than allowable length (jabber)