


Chapter 5: Jumper Settings
HEWLETT PACKARD, INC.
D 2 3 7 8 B

NIC Type Token Ring
Transfer Rate 4/16Mbps
Data Bus 16-bit ISA
Topology Ring
Wiring Type Shielded twisted pair
Unshielded twisted pair
Boot ROM Available

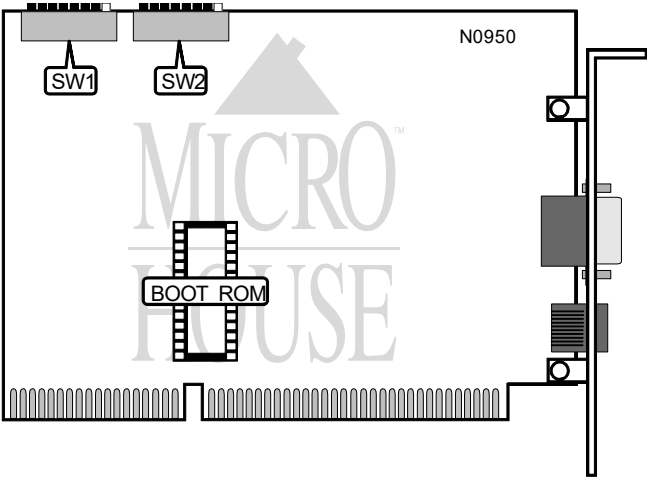

BASE I/O ADDRESS SELECTION		
Address	SW1/2	SW1/3
A20 & A30	Off	Off
A24 & A40	On	Off
A50 & A60	Off	On
A54 & A70	On	On

INTERRUPT SELECTION			
IRQ	SW2/1	SW2/2	SW2/3
9	Off	Off	Off
3	On	Off	On
5	Off	On	On
7	On	On	On
10	On	Off	Off
11	Off	On	Off
12	On	On	Off
15	Off	Off	On

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
HEWLETT PACKARD, INC.
D 2 3 7 8 B

... continued from previous page.

DMA CHANNEL SELECTION			
Channel	SW2/4	SW2/5	SW2/6
i 5	Off	Off	Off
0	On	On	On
1	Off	Off	On
3	On	Off	On
6	On	Off	Off
7	Off	On	Off

NETWORK SPEED SELECTION	
Speed	SW1/1
i 4	Off
16	On

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/4	Off
SW1/5	On
SW1/6	On
SW1/7	Off
SW1/8	Off
SW2/7	Off
SW2/8	Off