


**Chapter 5: Jumper Settings**  
**HEWLETT PACKARD, INC.**  
**D 2 3 7 8 A**

**NIC Type** Token Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit ISA  
**Topology** Ring  
**Wiring Type** Shielded twisted pair  
Unshielded twisted pair  
**Boot ROM** Available

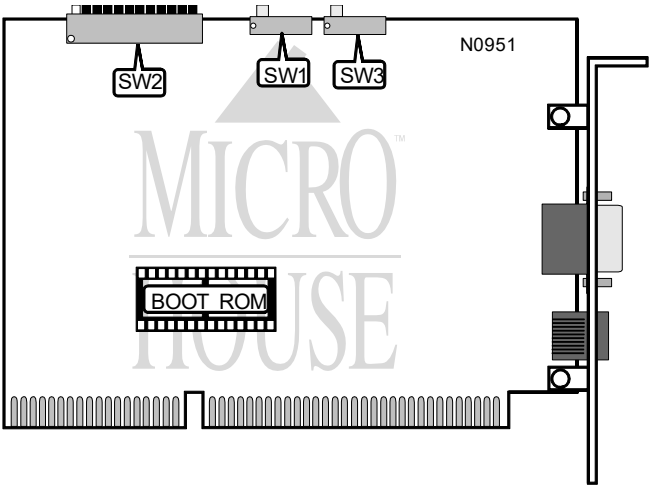

BASE I/O ADDRESS SELECTION		
Address	SW2/9	SW2/10
if A20 & A30	Off	Off
A24 & A40	On	Off
A50 & A60	Off	On
A54 & A70	On	On

INTERRUPT SELECTION		
IRQ	SW2/7	SW2/8
if 9	On	On
3	On	Off
10	Off	On
11	Off	Off

Continued next page...

**THE NETWORK INTERFACE CARD TECHNICAL GUIDE**  
**HEWLETT PACKARD, INC.**  
**D 2 3 7 8 A**

... continued from previous page.

DMA CHANNEL SELECTION		
DMA	SW2/11	SW2/12
i 5	On	On
6	On	Off
7	Off	On
Programmed I/O	Off	Off
Note: Programmed I/O overrides when used in an 8-bit slot.		

NETWORK SPEED SELECTION	
Speed	SW1
i 4	Off
16	On

CABLE TYPE SELECTION	
Speed	SW1
i Unshielded Twisted Pair	Off
Shielded Twisted Pair	On

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW2/1	On
SW2/2	On
SW2/3	On
SW2/4	Off
SW2/5	Off
SW2/6	On