

THE NETWORK INTERFACE CARD TECHNICAL GUIDE

STANDARD MICROSYSTEMS CORPORATION

SMC3016/MC

NIC Type

Transfer Rate

Data Bus

Topology

Wiring Type

Boot ROM

Ethernet

10Mbps


16-bit MCA

Linear Bus

RG58A/U 50ohm coaxial

AUI transceiver via DB-15 port

Available

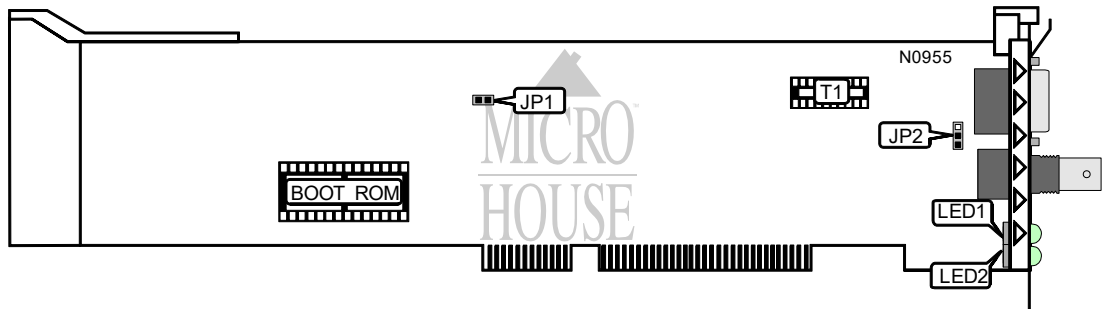

CABLE TYPE		
Type	JP1	Pulse Transformer T1
i RG58A/U 50ohm coaxial	Open	Installed
AUI transceiver via DB-15 port	Closed	Not installed

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Setting
JP2	All open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Data is being received
LED1	Green	Off	Data is not being received
LED2	Green	On	Data is being transmitted
LED2	Green	Off	Data is not being transmitted