


**Chapter 5: Jumper Settings**  
**PROTEC MICROSYSTEMS, INC.**  
**N I C - 1 6 E**

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Linear Bus/Star  
**Wiring Type** Unshielded twisted pair  
 AUI Transceiver via DB-15 port  
 RG-58A/U 50ohm coaxial

**Boot ROM** Available

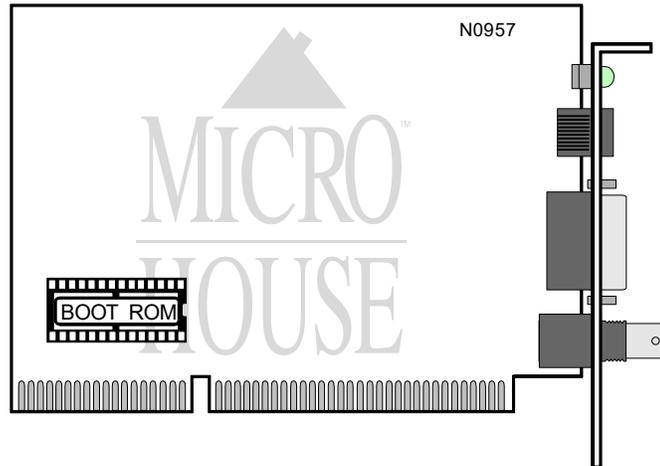

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED	On	RJ-45 port being used
LED	Off	AUI or RG-58A/U port being used