


COROLLARY, INC.

8 X 4 G T

Card Type	Serial
Processor	80286
Processor Speed	25MHz
Chipset	8530
Maximum Onboard Memory	128KB SRAM
I/O Options	Serial ports (32)
Data Bus	16-bit ISA
Card Size	Full height, three-quarters length

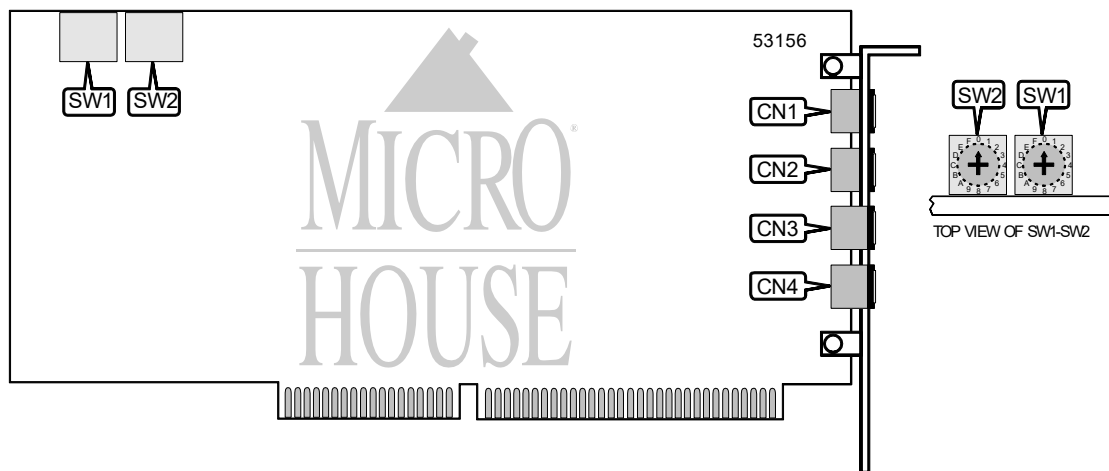

CONNECTIONS			
Function	Label	Function	Label
Serial ports 1-8	CN1	Serial ports 17-24	CN3
Serial ports 9-16	CN2	Serial ports 25-32	CN4
Note: Standard RJ-11 serial ports are provided on external expansion boxes.			

Continued on next page. . .

COROLLARY, INC.

8 X 4 G T

... continued from previous page

BASE I/O ADDRESS SELECTION		
Setting	SW1	SW2
0A0000h	Position A	Position 0
0B0000h	Position B	Position 0
0C0000h	Position C	Position 0
0D0000h	Position D	Position 0
0E0000h	Position E	Position 0
D00000h	Position 0	Position D
D20000h	Position 2	Position D
D40000h	Position 4	Position D
D60000h	Position 6	Position D
D80000h	Position 8	Position D
DA0000h	Position A	Position D
DC0000h	Position C	Position D
DE0000h	Position E	Position D
E00000h	Position 0	Position E
E20000h	Position 2	Position E
E40000h	Position 4	Position E
E60000h	Position 6	Position E
E80000h	Position 8	Position E
EA0000h	Position A	Position E
EC0000h	Position C	Position E
EE0000h	Position E	Position E
Note: If settings below D00000h are used, the card will use 8-bit data transfers.		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED	Red	On	Power is on
LED	Red	Blinking	Error has occurred
LED	Red	Off	Power is off
Note: The location of the LED is unidentified.			