


Chapter 5: Jumper Settings
PROTEC MICROSYSTEMS, INC.
N I C - 1 6 E 2

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 RG-58A/U 50ohm coaxial
Boot ROM Available

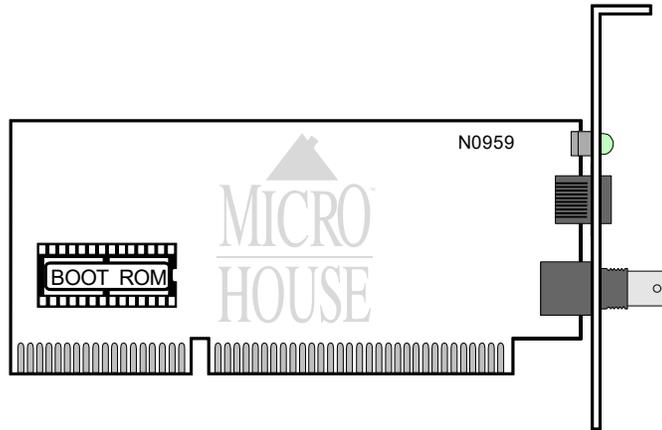

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED	On	RJ-45 port being used
LED	Off	AUI or RG-58A/U port being used