


NEWCOM, INC.

NEWTALK DSVD (NO COM IRQ JUMPER)

Card Type	Modem (asynchronous)
Chipset	Phylon PHY2000
I/O Options	Audio line in, audio line out, microphone in, voice, speakerphone, DSVD
Maximum Data Rate	33.6Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation	ITU-T V.22, V.32, V.32bis, V.34
Fax Modulation	ITU-T V.17, V.21CH2, V.27ter, V.29
Error	V.42, V.42bis
Correction/Compression	
Fax Class	Class I
Data Bus	16-bit ISA
Card Size	Full height, half length

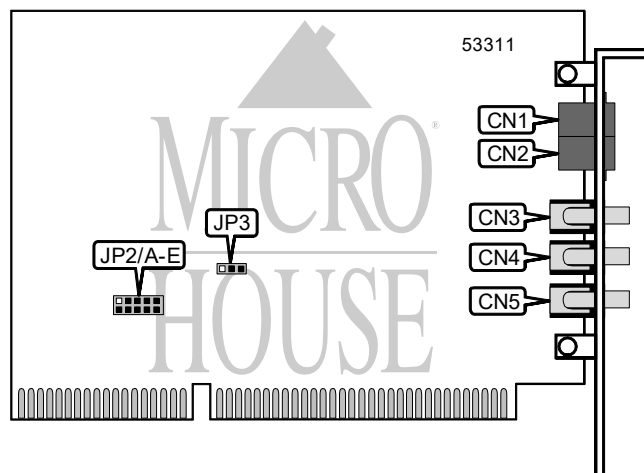

CONNECTIONS			
Function	Label	Function	Label
Telephone line	CN1	Microphone in	CN4
Telephone line	CN2	Audio line in	CN5
Audio line out	CN3		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í DSP base I/O address is 380h	JP3	Pins 1 & 2 closed
DSP base I/O address is 300h	JP3	Pins 2 & 3 closed

DSP INTERRUPT SELECTION					
Setting	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
7	Closed	Open	Open	Open	Open
10	Open	Closed	Open	Open	Open
í 11	Open	Open	Closed	Open	Open
12	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Closed

Continued on next page. . .

NEWCOM, INC. NEWTALK DSVD (NO COM IRQ JUMPER)

. . . continued from previous page

SUPPORTED STANDARD COMMANDS	
Basic AT Commands	
+++, 'comma', A/	
A, D, E, L, M, N, P, Q, T, V, W, X, Z	
&D, &F, &K, &P, &T	
Extended AT Commands	
%C, %E	
S-Registers	
S0, S7, S10, S91	
Note: See MHI help file for complete information.	

UNIDENTIFIED COMMANDS	
Command	Default
S95	Unidentified

Proprietary AT Command Set

See NEWCOM, INC. NEWTALK DSVD (WITH COM IRQ JUMPER) for a full command summary.