


# DIAMOND MULTIMEDIA SYSTEMS, INC.

## FIRE GL 1000

Card Type	Graphics adapter
Video Chip Set	3Dlabs
Maximum Video Memory	8MB SGRAM
Video Types Supported	VGA, XVGA
Highest Resolution Supported	1280 x 1024
Data Bus	32-bit PCI

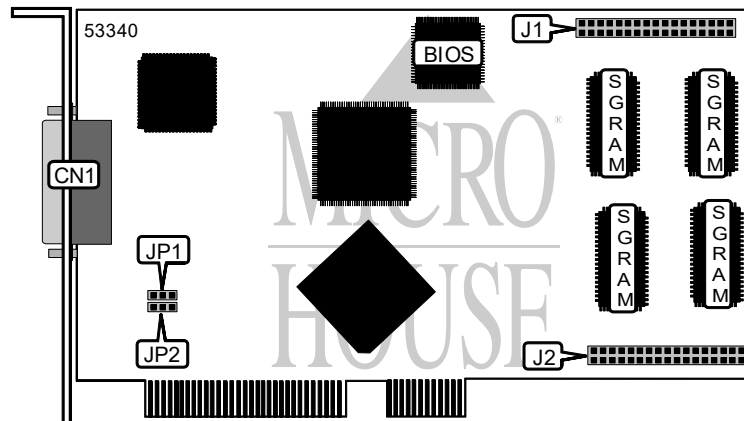

CONNECTIONS			
Function	Label	Function	Label
15-pin analog video port	CN1	Header connector to daughterboard	J2
Header connector to daughterboard	J1		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Windows compatibility enabled	JP1	Pins 1 & 2 closed	
Windows compatibility disabled	JP1	Pins 2 & 3 closed	
í On-board VGA enabled	JP2	Pins 1 & 2 closed	
On-board VGA disabled	JP2	Pins 2 & 3 closed	


MEMORY CONFIGURATION
The Fire GL 1000 has 4MB of SGRAM (synchronous graphics memory) installed. This can be upgraded with a memory Upgrade module containing another 4MB of SGRAM. The upgrade module is installed piggyback onto the Fire GL 1000 board.

*Continued on next page . . .*

# DIAMOND MULTIMEDIA SYSTEMS, INC.

## FIRE GL 1000

. . . continued from previous page

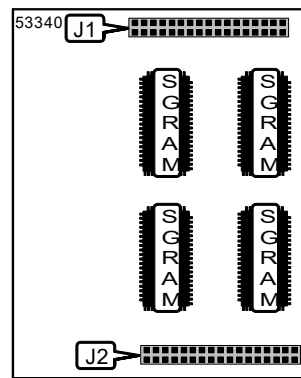

Upgrade module

CONNECTIONS			
Function	Label	Function	Label
Header connector to mainboard	J1	Header connector to mainboard	J2