


MEDIA VISION TECHNOLOGY, INC.

CDPC-AT INTERFACE CARD (650-0024-05)

Card Type	CR-ROM Interface card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Interface connector
Data Bus	16-bit ISA

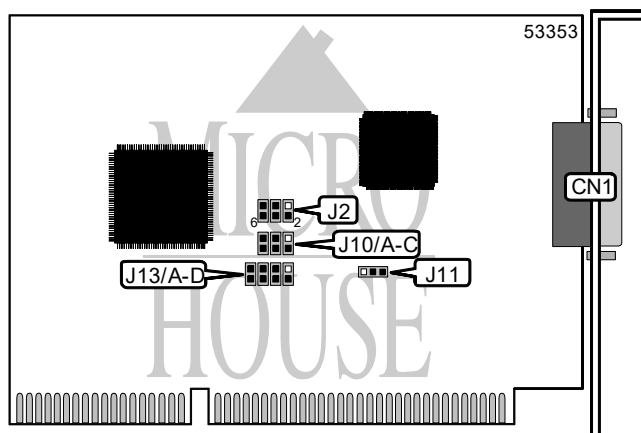

CONNECTIONS	
Function	Label
Interface connector	CN1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í DMA sharing - disabled	J11	Pins 2 & 3 closed
DMA sharing - enabled	J11	Pins 1 & 2 closed

PORT ADDRESS SELECTION			
Setting	J10/A	J10/B	J10/C
í 220	Open	Open	Closed
230	Open	Closed	Open
240	Closed	Open	Open

BOARD ID SELECTION
Note: Closing J2/pins 5 & 6 forces the board base I/O address to 388h. When using the other jumper settings, the software scans for an available base I/O address. Refer to the manufacturer's documentation for possible ID and base I/O settings.

INTERRUPT SELECTION				
Setting	J13/A	J13/B	J13/C	J13/D
IRQ2	Open	Open	Open	Closed
IRQ3	Open	Open	Closed	Open
í IRQ5	Open	Closed	Open	Open
IRQ7	Closed	Open	Open	Open

MISCELLANEOUS TECHNICAL NOTES
Note: Termination Power and termination settings are unidentified.