


**Chapter 5: Jumper Settings**  
**CABLETRON SYSTEMS, INC.**  
**E 2 2 1 2**

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	16-bit ISA
<b>Topology</b>	Linear bus
	Star
<b>Wiring Type</b>	RG-58A/U 50ohm coaxial
	Unshielded twisted pair
<b>Boot ROM</b>	Available

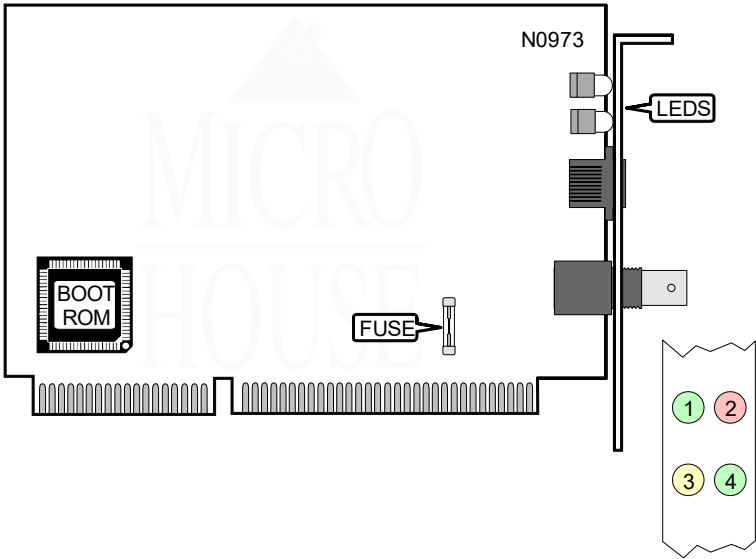

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	Blinking	Data is being transmitted
LED1	Green	Off	Data is not being transmitted
LED2	Red	Blinking	Collision detected
LED2	Red	Off	No collision
LED3	Yellow	Blinking	Data is being received
LED3	Yellow	Off	Data is not being received
LED4	Green	On	Network connection is good
LED4	Green	Off	Network connection is broken
Note: LED2 is always off in full duplex mode.			