


MEDIA VISION TECHNOLOGY, INC.

PRO AUDIO SPECTRUM 16 REV.C (650-0022-01)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	SCSI interface, Game/MIDI port, microphone in, stereo line in, stereo line out, audio in, PC speaker, auxiliary connector
Data Bus	16-bit ISA

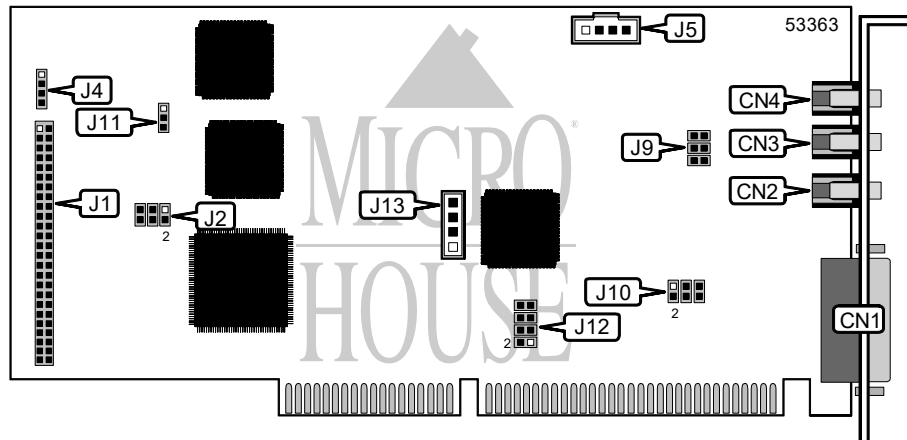

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	50-pin SCSI connector	J1
Microphone in	CN2	PC speaker connector	J4
Stereo line out	CN3	Audio in - CD-ROM	J5
Stereo line in	CN4	Auxiliary connector	J13

USER CONFIGURABLE SETTINGS		
Function	Label	Position
DMA sharing - disabled	J11	Pins 2 & 3 closed
DMA sharing - enabled	J11	Pins 1 & 2 closed
Factory configured - do not alter	J9	Unidentified

BASE I/O ADDRESS SELECTION			
Setting	J10/pins 1 & 2	J10/pins 3 & 4	J10/pins 5 & 6
220	Open	Open	Closed
230	Open	Closed	Open
240	Closed	Open	Open

BOARD ID SELECTION			
Setting	J2/pins 1 & 2	J2/pins 3 & 4	J2/pins 5 & 6
0	Open	Open	Open
1	Closed	Open	Open
2	Open	Closed	Open
3	Closed	Closed	Open
4	Open	Open	Closed

Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.

Continued on next page . . .

MEDIA VISION TECHNOLOGY, INC.
PRO AUDIO SPECTRUM 16 REV.C (650-0022-01)

. . . continued from previous page

INTERRUPT SELECTION				
Setting	J12/pins 1 & 2	J12/pins 3 & 4	J12/pins 5 & 6	J12/pins 7 & 8
IRQ2	Open	Open	Open	Closed
IRQ3	Open	Open	Closed	Open
IRQ5	Open	Closed	Open	Open
IRQ7	Closed	Open	Open	Open