


DOLPHIN PERIPHERALS, LLC.

FASTISA-4090

Card Type	Parallel & Serial card
Chip Set	ADP/Startech
Maximum Onboard Memory	None
I/O Options	Parallel ports (3), serial ports (4)
Data Bus	16-bit ISA
Floppy drives supported	None

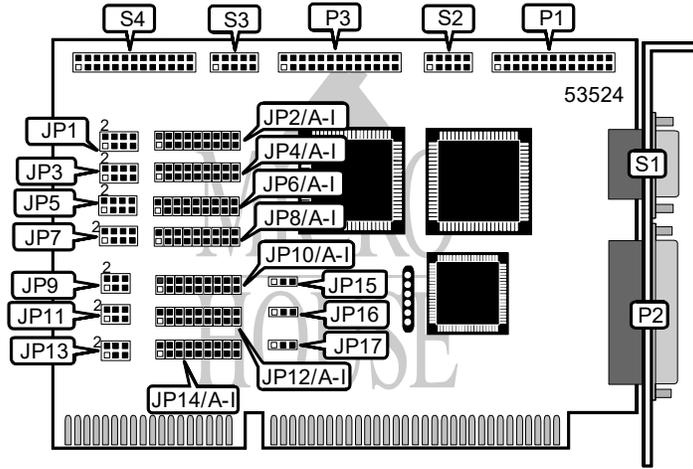

CONNECTIONS			
Function	Location	Function	Location
26-pin parallel port 1	P1	10-pin serial port 2	S2
25-pin parallel port 2	P2	10-pin serial port 3	S3
26-pin parallel port 3	P3	26-pin serial port 4	S4
9-pin serial port 1	S1		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Printer port P1 is bi-directional mode	JP15	Pins 1 & 2 closed	
Printer port P1 is normal mode	JP15	Pins 2 & 3 closed	
Printer port P2 is bi-directional mode	JP16	Pins 1 & 2 closed	
Printer port P2 is normal mode	JP16	Pins 2 & 3 closed	
Printer port P3 is bi-directional mode	JP17	Pins 1 & 2 closed	
Printer port P3 is normal mode	JP17	Pins 2 & 3 closed	

SERIAL PORT 1 ADDRESS SELECTION				
COM	JP1/pins 1 & 2	JP1/pins 3 & 4	JP1/pins 5 & 6	JP1/pins 7 & 8
COM1(3F8h)	Closed	Open	Open	Open
COM2(2F8h)	Open	Closed	Open	Open
COM3(3E8h)	Open	Open	Closed	Open
COM4(2E8h)	Open	Open	Open	Closed

Continued on next page. . .

DOLPHIN PERIPHERALS, LLC.
FASTISA-4090

...continued from previous page

SERIAL PORT 2 ADDRESS SELECTION				
COM	JP3/pins 1 & 2	JP3/pins 3 & 4	JP3/pins 5 & 6	JP3/pins 7 & 8
COM1(3F8h)	Closed	Open	Open	Open
í COM2(2F8h)	Open	Closed	Open	Open
COM3(3E8h)	Open	Open	Closed	Open
COM4(2E8h)	Open	Open	Open	Closed

SERIAL PORT 3 ADDRESS SELECTION				
COM	JP5/pins 1 & 2	JP5/pins 3 & 4	JP5/pins 5 & 6	JP5/pins 7 & 8
COM1(3F8h)	Closed	Open	Open	Open
COM2(2F8h)	Open	Closed	Open	Open
í COM3(3E8h)	Open	Open	Closed	Open
COM4(2E8h)	Open	Open	Open	Closed

SERIAL PORT 4 ADDRESS SELECTION				
COM	JP7/pins 1 & 2	JP7/pins 3 & 4	JP7/pins 5 & 6	JP7/pins 7 & 8
COM1(3F8h)	Closed	Open	Open	Open
COM2(2F8h)	Open	Closed	Open	Open
COM3(3E8h)	Open	Open	Closed	Open
í COM4(2E8h)	Open	Open	Open	Closed

PARALLEL PORT 1 ADDRESS SELECTION			
LPT	JP9/pins 1 & 2	JP9/pins 3 & 4	JP9/pins 5 & 6
íLPT1(3BCh)	Closed	Open	Open
LPT2(378h)	Open	Closed	Open
LPT3(278h)	Open	Open	Closed

PARALLEL PORT 2 ADDRESS SELECTION			
LPT	JP11/pins 1 & 2	JP11/pins 3 & 4	JP11/pins 5 & 6
LPT1(3BCh)	Closed	Open	Open
íLPT2(378h)	Open	Closed	Open
LPT3(278h)	Open	Open	Closed

PARALLEL PORT 3 ADDRESS SELECTION			
LPT	JP13/pins 1 & 2	JP13/pins 3 & 4	JP13/pins 5 & 6
LPT1(3BCh)	Closed	Open	Open
LPT2(378h)	Open	Closed	Open
íLPT3(278h)	Open	Open	Closed

Continued on next page. . .

DOLPHIN PERIPHERALS, LLC.
FASTISA-4090

...continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION									
IRQ	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G	JP2/H	JP2/I
IRQ3	Closed	Open							
í IRQ4	Open	Closed	Open						
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

SERIAL PORT 2 INTERRUPT SELECTION									
IRQ	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F	JP4/G	JP4/H	JP4/I
í IRQ3	Closed	Open							
IRQ4	Open	Closed	Open						
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

SERIAL PORT 3 INTERRUPT SELECTION									
IRQ	JP6/A	JP6/B	JP6/C	JP6/D	JP6/E	JP6/F	JP6/G	JP6/H	JP6/I
IRQ3	Closed	Open							
IRQ4	Open	Closed	Open						
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
í IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

SERIAL PORT 4 INTERRUPT SELECTION									
IRQ	JP8/A	JP8/B	JP8/C	JP8/D	JP8/E	JP8/F	JP8/G	JP8/H	JP8/I
IRQ3	Closed	Open							
IRQ4	Open	Closed	Open						
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
í IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

Continued on next page . . .

