


CREATIVE LABS, INC. SOUNDBLASTER AWE32 VALUE IDE (CT3919 & CT3910)

Card Type Sound card
Chip Set Creative Technology
Maximum Onboard Memory None
I/O Options Line in connector, microphone in connector, line out connector, speaker out connector, game/MIDI port, CD-ROM audio in connector, CD-ROM interface, PC internal speaker
Data Bus 16-bit ISA

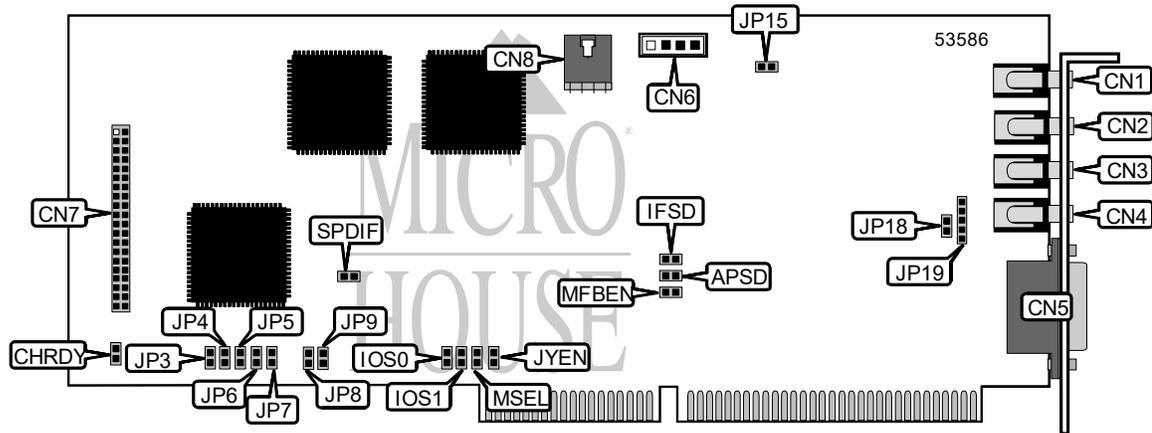

CONNECTIONS			
Function	Label	Function	Label
Line in connector	CN1	CD-ROM audio in connector	CN6
Microphone connector	CN2	CD-ROM interface	CN7
Line out connector	CN3	CD-ROM audio in connector	CN8
Speaker out connector	CN4	PC internal speaker	JP15
Game/MIDI port	CN5		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured – do not alter	CHRDY	Unidentified	
í Factory configured – do not alter	JP18	Unidentified	
í Factory configured – do not alter	JP19	Unidentified	
í Joystick enabled	JYEN	Closed	
Joystick disabled	JYEN	Open	
í MP-401 I/O address select 330	MSEL	Closed	
MP-401 I/O address select 300	MSEL	Open	
í MP-401 enabled	MFBE	Closed	
MP-401 disabled	MFBE	Open	
í Factory configured – do not alter	SPDIF	Unidentified	

Continued on next page. . .

CREATIVE LABS, INC.
 SOUNDBLASTER AWE32 VALUE IDE (CT3919 &
 CT3910)

... continued from previous page

AUDIO I/O ADDRESS SELECTION		
Address	IOS0	IOS1
í 220h	Closed	Closed
240h	Open	Closed
260h	Closed	Open
280h	Open	Open

CSP CHIP SELECTION		
Setting	APSD	IFSD
Enabled	Open	Open
Disabled	Closed	Closed

IDE PORT SELECTION		
Port	JP8	JP9
Secondary	Open	Closed
í Tertiary	Closed	Open
Quaternary	Open	Open
Disabled	Closed	Closed

IDE INTERRUPT SELECTION					
IRQ	JP3	JP4	JP5	JP6	JP7
10	Closed	Open	Open	Open	Open
í 11	Open	Closed	Open	Open	Open
12	Open	Open	Closed	Open	Open
14	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Closed