


Chapter 5: Jumper Settings

PUREDATA LTD.
P D U C 8 0 2 3 - T

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit MCA
Topology Star
Wiring Type Unshielded twisted pair
Boot ROM Available

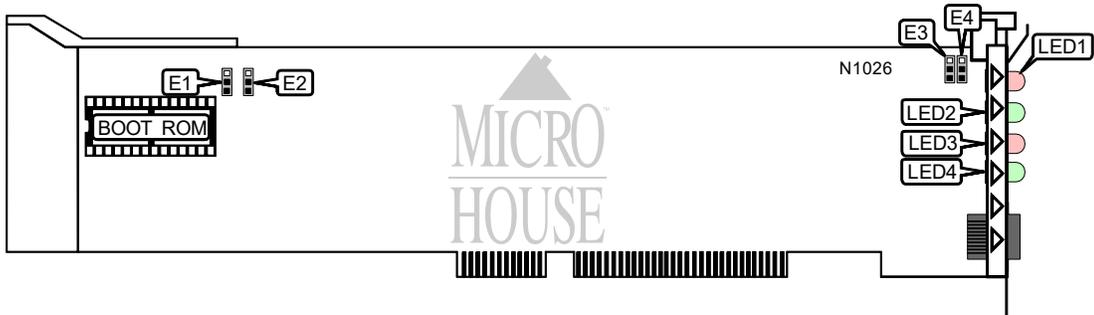

ROM SIZE SELECTION		
Size	E1	E2
16K	pins 1 & 2 closed	pins 1 & 2 closed
32K	pins 1 & 2 closed	pins 2 & 3 closed
64K	pins 2 & 3 closed	pins 2 & 3 closed

LINK INTEGRITY CONFIGURATION	
Setting	E3
Enabled	pins 1 & 2 closed
Disabled	pins 2 & 3 closed

REVERSED POLARITY DETECTION CONFIGURATION	
Setting	E4
Enabled	pins 1 & 2 closed
Disabled	pins 2 & 3 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Data is being transmitted/received
LED1	Red	Off	Data is not being transmitted/received
LED2	Green	On	Network activity detected
LED2	Green	Off	Network activity not detected
LED3	Red	On	Polarity reversed
LED3	Red	Off	Polarity normal
LED4	Green	On	Network connection is good
LED4	Green	Off	Network connection is broken