


Chapter 5: Jumper Settings
EFA CORPORATION
EFA 170 SPIC3

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	PCI
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Not available

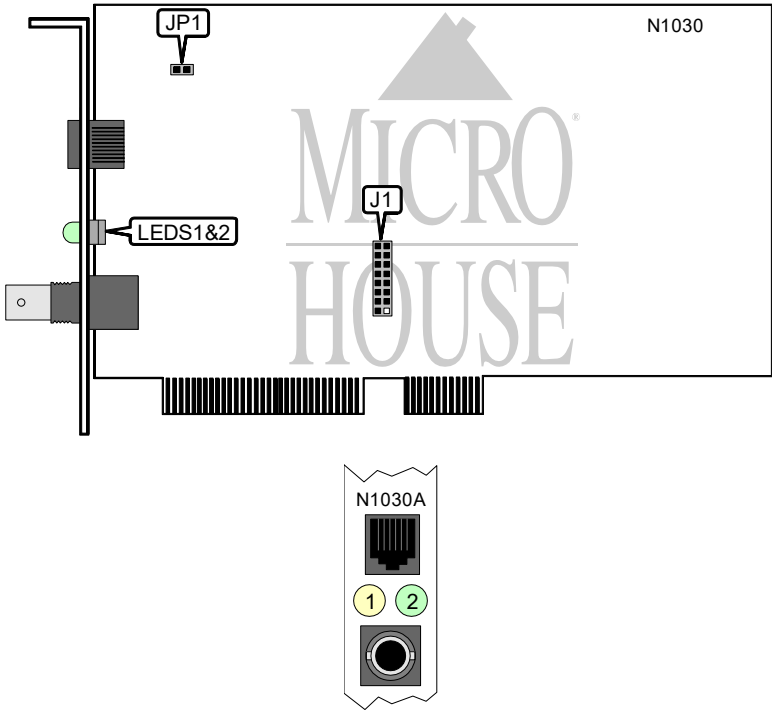

CONNECTION(S)			
Purpose		Location	
External LED connector		JP1	
AUI connector		J1	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Amber	Blinking	Data is being transmitted/received
LED1	Amber	Off	Data is not being transmitted/received
LED2	Green	On	Network connection good
LED2	Green	Off	Network connection broken