


# LOGICODE TECHNOLOGY, INC.

## 14.4 INTERNAL (SWITCH VERSION)

<b>Card Type</b>	Modem (asynchronous)
<b>Chipset</b>	Unidentified
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Modulation</b>	Bell 103A, 212A
<b>Fax Modulation</b>	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Error</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Correction/Compression</b>	MNP5, V.42, V.42bis
<b>Fax Class</b>	Class I & II
<b>Data Bus</b>	8-bit ISA
<b>Card Size</b>	Full-height, one-third length

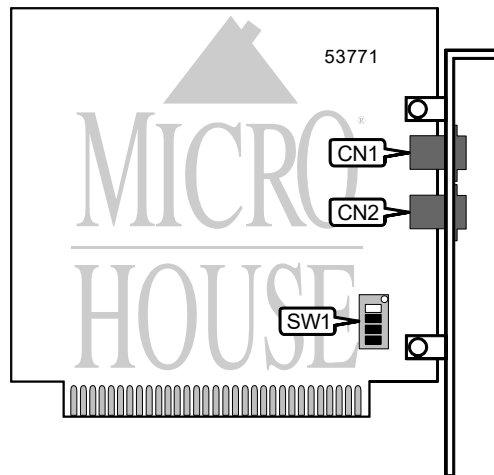

CONNECTIONS			
Function	Label	Function	Label
Telephone line	CN1	Telephone line	CN2

SERIAL PORT ADDRESS SELECTION		
Setting	SW1/1	SW1/2
3F8h (COM1:)	Off	Off
2F8h (COM2:)	Off	On
3E8h (COM3:)	On	Off
2E8h (COM4:)	On	On

INTERRUPT SELECTION		
Setting	SW1/3	SW1/4
2	On	On
3	Off	On
4	Off	Off
5	On	Off

Continued on next page. . .

# LOGICODE TECHNOLOGY, INC.

## 14.4 INTERNAL (SWITCH VERSION)

. . . continued from previous page

SUPPORTED STANDARD COMMANDS	
Basic AT Commands	
+++, 'comma', A/	
A, C, D, E, F, H, L, M, N, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &K, &L, &P, &R, &S, &T, &V, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \G, \J, \N, \O, \Q, \T, \U, \V, \X, \Y, \Z	
%A, %C, %E, %G	
Special AT Commands	
-C, -J, "H, "O	
S-Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S26	
S27, S30, S37, S95, S108, S109, S110	
Note: See MHI help file for complete information.	

### Proprietary AT Command Set

See LOGICODE TECHNOLOGY, INC. 9600 EXTERNAL for a full command summary.