


Chapter 5: Jumper Settings
TRENDWARE INTERNATIONAL, INC.
E T H E R - 1 6 T

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

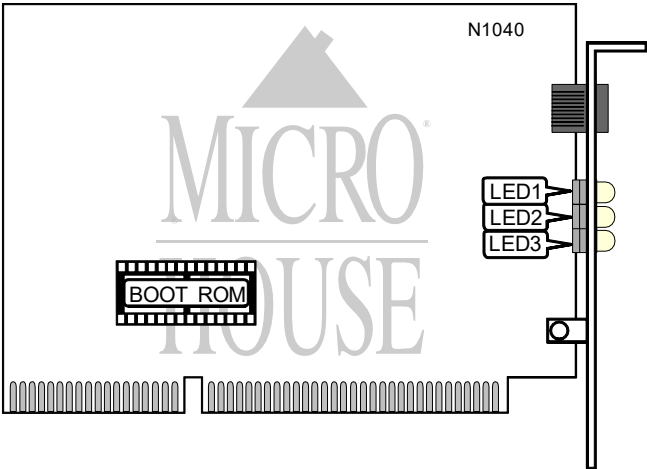

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Power on
LED1	Off	Power off
LED1	Blinking	Data is transmitting
LED2	On	Network connection is good
LED2	Off	Network connection is broken
LED2	Blinking	Data is being received
LED3	On	Collision detected on network
LED3	Off	No collision detected on network