


Chapter 5: Jumper Settings
TRENDWARE INTERNATIONAL, INC.
E T H E R - 1 6 C

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
Boot ROM	Available

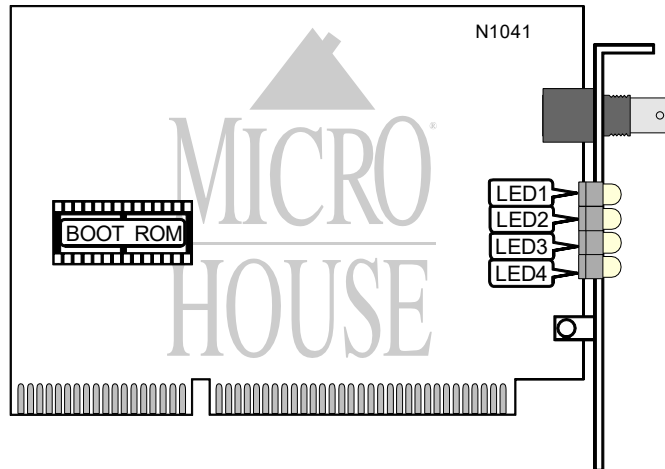

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Power on
LED1	Off	Power off
LED2	On	Link is good
LED2	Off	Link is broken
LED3	On	Collision detected on network
LED3	Off	No collision detected on network
LED4	On	Card is transmitting for an extended period (Jabber)
LED4	Off	Normal operation