


**Chapter 5: Jumper Settings**  
**CNET TECHNOLOGY, INC.**  
**C N 1 0 0 0 T / 2**

**NIC Type** Token Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit MCA  
**Topology** Ring  
**Wiring Type** Shielded twisted pair  
 Unshielded twisted pair  
**Boot ROM** Available

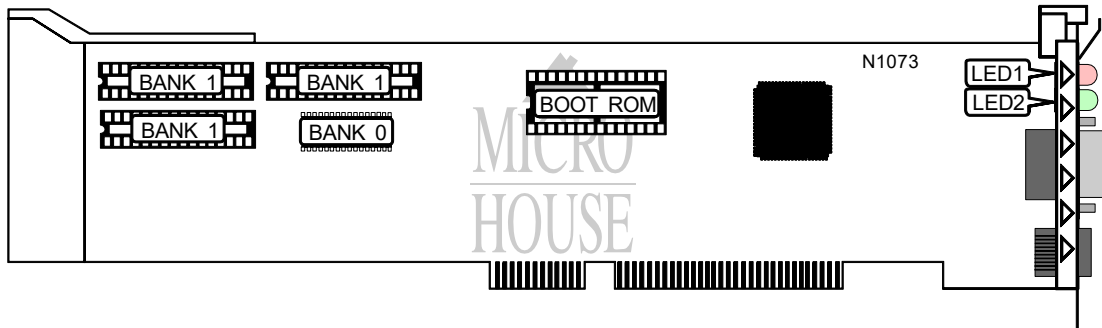

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
128KB	(1) 128K x 8	NONE
512KB	(1) 128K x 8	(3) 128K x 8

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Node is inserted in Ring
LED1	Red	Off	Node is not inserted in Ring
LED2	Green	Blinking	Data is being transmitted/received
LED2	Green	Off	Data is not being transmitted/received