


DIAMOND MULTIMEDIA SYSTEMS, INC.

SUPRAEXPRESS 144I PNP

Card Type	Fax, Modem (asynchronous)
Chip Set	Rockwell
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	16-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103/212A
	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
Fax Modulation Protocol	ITU-T V.17, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

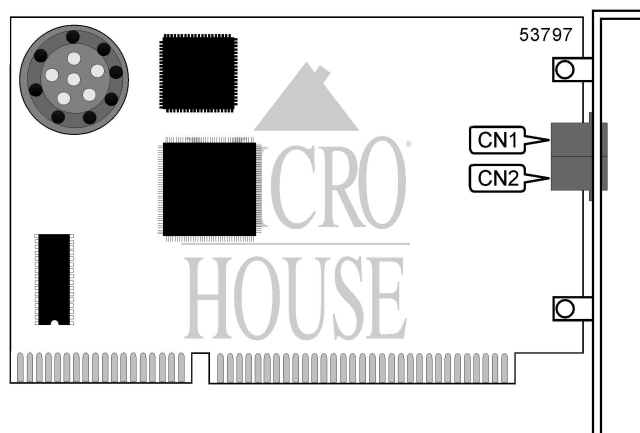

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', 'comma', A/	
A, E, H, L, N, O, P, R, S, T, U, V, W, Y, Z	
&A, &B, &C, &G, &J, &K, &L, &P, &R, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \E, \G, \J, \K, \L, \N, \O, \Q, \T, \U, \V, \W, \X, \Y, \Z	
%A, %C, %E, %L, %Q, %TT	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S18, S38, S39,	
S46, S48, S82, S86, S90, S91, S92, S95, S99, S108, S109, S110, 201	
Special Commands	
"H, "N, "O, -J,)M, :E, +MS?, +MS	
Note: See MHI Help File for full command documentation.	

Proprietary AT Command Set

See model SUPRAEXPRESS 288 PNP for a full command summary.