


DIAMOND MULTIMEDIA SYSTEMS, INC.

SUPRAFAX MODEM 288I PNP

Card Type	Fax, Modem (asynchronous)
Chip Set	Rockwell
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	16-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, MNP10, V.42, V.42bis

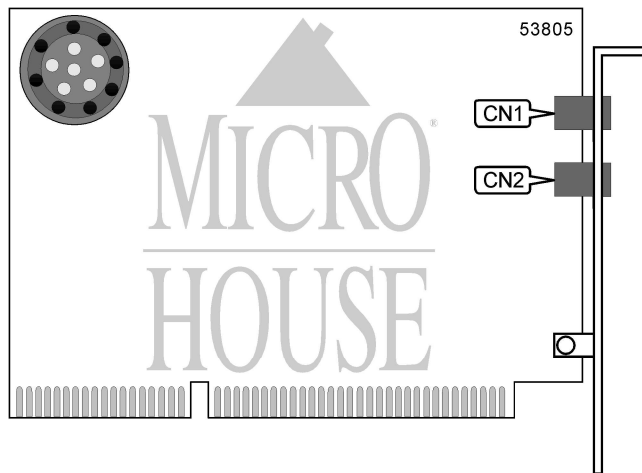

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', 'comma', A/	
A, C, D, E, F, H, L, N, O, P, Q, R, S, T, U, V, W, Y, Z	
&A, &B, &C, &G, &J, &K, &L, &P, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\C, \E, \O, \Q, \T, \U, \V, \X, \Y, \Z	
%A, %TT	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S18, S25, S26,	
S38, S46, S48, S82, S86, S90, S91, S92, S95, S99, S108, S109, S110	
Special Commands	
"H, "N, "O, -J,)M, +MS?	
Note: See MHI Help File for full command documentation.	

Proprietary AT Command Set

See document SUPRAFAX MODEM 288I for a full command summary.