


Chapter 5: Jumper Settings
ICL
ETHERTEAM 16I COMBO

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Shielded twisted pair
	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

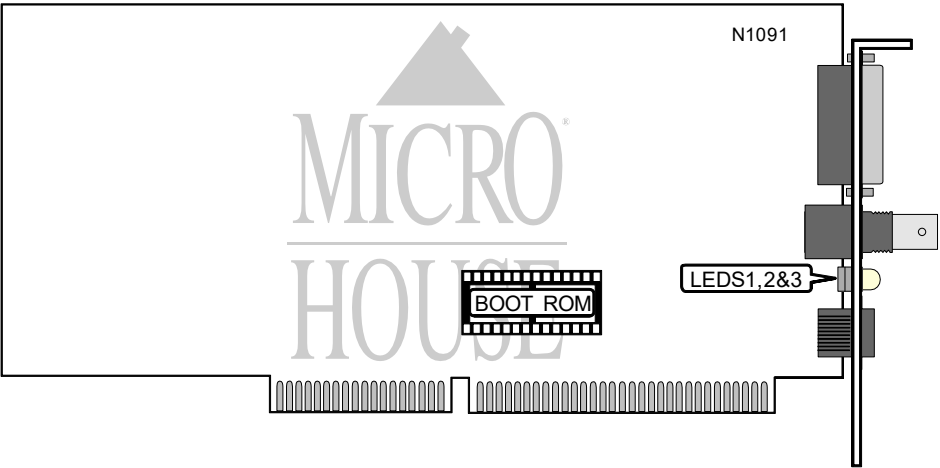

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	TP repeater connection is good
LED1	Green	Off	TP repeater connection is broken
LED2	Yellow	On	Data is being transmitted/received
LED2	Yellow	Off	Data is not being transmitted/received
LED3	Red	Blinking	Network connection is good
LED3	Red	Off	Network connection is broken