


# REVEAL COMPUTER PRODUCTS

## SC400 PRO 16 (REV. 1)

<b>Card Type</b>	Sound card
<b>Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	None
<b>I/O Options</b>	Line in, microphone in, volume control, speaker out, game/MIDI port, audio in - CD-ROM, CD-ROM interfaces (2), PC speaker - internal, wavetable connector
<b>Data Bus</b>	16-bit ISA

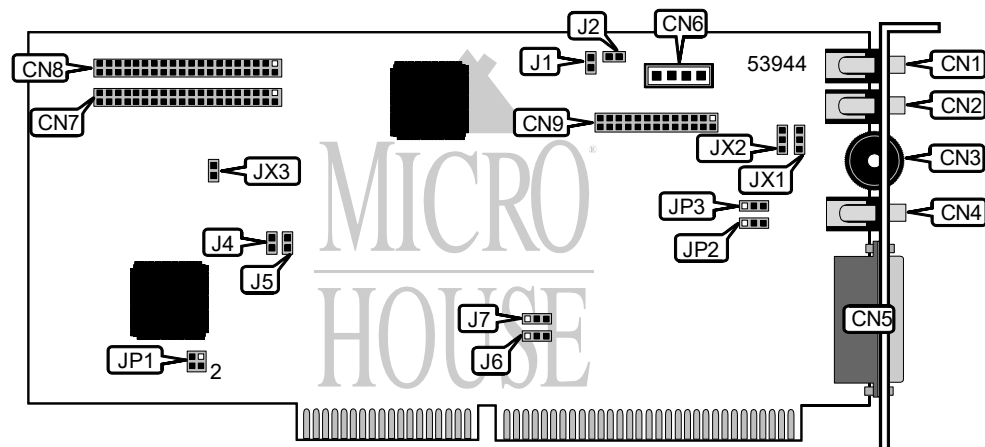

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Audio in-CD-ROM	CN6
Microphone in	CN2	CD-ROM interface (Panasonic)	CN7
Volume control	CN3	CD-ROM interface (Mitsumi)	CN8
Speaker out	CN4	Wavetable connector	CN9
Game/MIDI port	CN5	PC speaker - internal (not used)	J2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured – do not alter (PC speaker amp)	J1	Open	
í Factory configured – do not alter	J4	Closed	
í Factory configured – do not alter	J5	Closed	
í Factory configured – do not alter (microphone select)	JX1	Unidentified	
í Factory configured – do not alter (microphone select)	JX2	Unidentified	
Programmable EEPROM enabled	JX3	Closed	
Programmable EEPROM disabled	JX3	Open	

Continued on next page. . .

# REVEAL COMPUTER PRODUCTS

## SC400 PRO 16 (REV. 1)

. . . continued from previous page

MITSUMI INTERRUPT SELECTION		
IRQ	JP1/pins 1 & 2	JP1/pins 3 & 4
12	Open	Closed
15	Closed	Open

SPEAKER AMPLIFIER SELECTION		
Setting	JP2	JP3
Enabled	Pins 2 & 3 closed	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed	Pins 1 & 2 closed

WAVETABLE ADDRESS SELECTION		
Address	J6	J7
530h	Pins 1 & 2 closed	Pins 1 & 2 closed
EB0h	Pins 1 & 2 closed	Pins 2 & 3 closed
F40h	Pins 2 & 3 closed	Pins 1 & 2 closed
604h	Pins 2 & 3 closed	Pins 2 & 3 closed