


3COM CORPORATION

SPORTSTER VI 28.8 INT

| | |
|-------------------------------------|--|
| Card Type | Fax, Modem (asynchronous), Voice |
| Chip Set | U.S. Robotics |
| I/O Options | Speakerphone, Voice-mail, Voice View |
| Maximum Data Rate | 28.8Kbps |
| Maximum Fax Rate | 14.4Kbps |
| Data Bus | 8-bit ISA |
| Fax Class | Class I & II |
| Data Modulation Protocol | Bell 103/212A ITU-T V.21, V.22, V.22bis, V.23, V.25, V.32, V.32bis, V.34 Rockwell V.FC |
| Fax Modulation Protocol | Unidentified |
| Error Correction/Compression | MNP5, V.42, V.42bis |

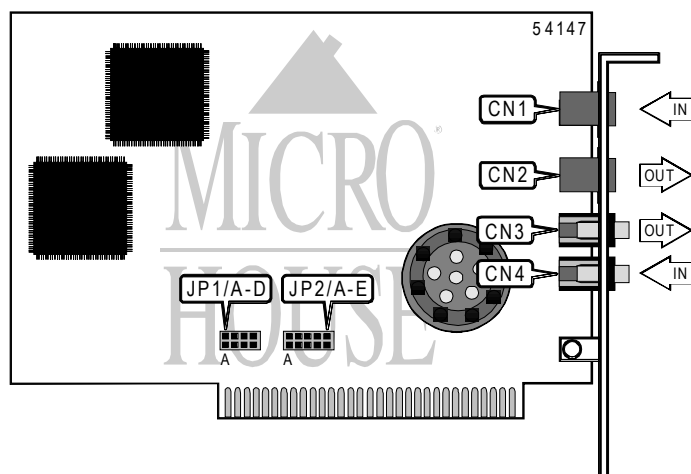

| CONNECTIONS | | | |
|-------------|-------|----------------|-------|
| Function | Label | Function | Label |
| Line in | CN1 | Microphone out | CN3 |
| Line out | CN2 | Speaker in | CN4 |

| SERIAL PORT ADDRESS | | | | |
|---------------------|--------|--------|--------|--------|
| Setting | JP1/A | JP1/B | JP1/C | JP1/D |
| COM1 (3F8h) | Closed | Open | Open | Open |
| COM2 (2F8h) | Open | Closed | Open | Open |
| COM3 (3E8h) | Open | Open | Closed | Open |
| COM4 (2E8h) | Open | Open | Open | Closed |

| INTERRUPT | | | | | |
|-----------|--------|--------|--------|--------|--------|
| Setting | JP2/A | JP2/B | JP2/C | JP2/D | JP2/E |
| 2 | Closed | Open | Open | Open | Open |
| 3 | Open | Closed | Open | Open | Open |
| 4 | Open | Open | Closed | Open | Open |
| 5 | Open | Open | Open | Closed | Open |
| 7 | Open | Open | Open | Open | Closed |

Proprietary AT Command Set

See document V1932 for a full command summary.