


INDUSTRIAL COMPUTER SOURCE

3085-ATT

Card Type
Chip Set
I/O options
Data Bus

Serial card
Unidentified
Serial ports (2)
8-bit ISA

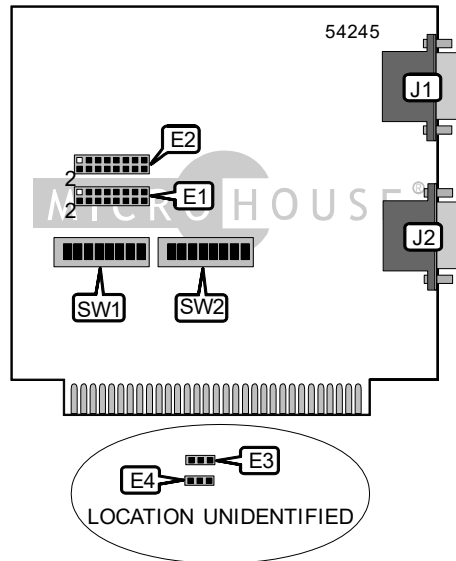

CONNECTIONS			
Function	Label	Function	Label
Serial port 1	J1	Serial port 2	J2

SERIAL PORT 1 SELECTION	
Setting	SW2/8
Enabled	On
Disabled	Off

SERIAL PORT 2 SELECTION	
Setting	SW1/8
Enabled	On
Disabled	Off

SERIAL PORT 1 ADDRESS SELECTION							
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
280	Off	On	Off	On	On	On	On
2A0	Off	On	Off	On	Off	On	On
2E8	Off	On	Off	Off	Off	On	Off
2F8	Off	Off	Off	Off	Off	Off	Off
3E8	Off	Off	Off	Off	Off	On	Off
300	Off	Off	On	On	On	On	On
328	Off	Off	On	On	Off	On	Off
3F8	Off	Off	Off	Off	Off	Off	Off

Continued on next page. . .

INDUSTRIAL COMPUTER SOURCE

3085-ATT

... continued from previous page

SERIAL PORT 2 ADDRESS SELECTION							
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
280	Off	On	Off	On	On	On	On
2A0	Off	On	Off	On	Off	On	On
2E8	Off	On	Off	Off	Off	On	Off
2F8	Off	Off	Off	Off	Off	Off	Off
3E8	Off	Off	Off	Off	Off	On	Off
300	Off	Off	On	On	On	On	On
328	Off	Off	On	On	Off	On	Off
3F8	Off	Off	Off	Off	Off	Off	Off

SERIAL PORT 1 INTERRUPT SELECTION	
IRQ	E1
IRQ2	Pins 1 & 2 closed
IRQ3	Pins 3 & 4 closed
IRQ4	Pins 5 & 6 closed
IRQ5	Pins 7 & 8 closed
IRQ10	Pins 9 & 10 closed
IRQ11	Pins 11 & 12 closed
IRQ12	Pins 13 & 14 closed
IRQ15	Pins 15 & 16 closed

SERIAL PORT 2 INTERRUPT SELECTION	
IRQ	E2
IRQ2	Pins 1 & 2 closed
IRQ3	Pins 3 & 4 closed
IRQ4	Pins 5 & 6 closed
IRQ5	Pins 7 & 8 closed
IRQ10	Pins 9 & 10 closed
IRQ11	Pins 11 & 12 closed
IRQ12	Pins 13 & 14 closed
IRQ15	Pins 15 & 16 closed

INTERRUPT SELECTION		
Setting	E3	E4
Normal interrupt mode	Pins 1 & 2 closed	Pins 1 & 2 closed
Multi-interrupt mode	Pins 2 & 3 closed	Pins 2 & 3 closed