


DOLPHIN PERIPHERALS, LLC.

FASTISA-4077

Card Type Multi - I/O
Chip Set Unidentified
I/O Options Parallel port, serial ports (2)
Data Bus 16-bit ISA

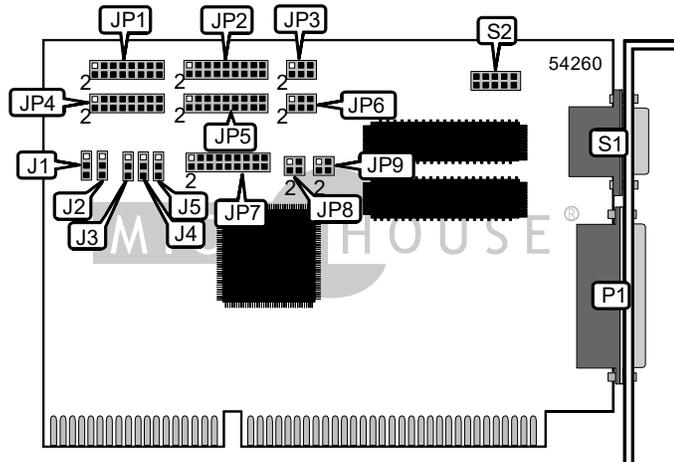

CONNECTIONS			
Function	Label	Function	Label
Parallel port	P1	Serial port 2	S2
Serial port 1	S1		

PARALLEL PORT ADDRESS SELECTION			
Setting	J3	J4	J5
3BC	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
378	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
278	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
268	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
26C	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
27C	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
Disabled	Open	Open	Open

Continued on next page. . .

DOLPHIN PERIPHERALS, LLC.
FASTISA-4077

... continued from previous page

SERIAL PORT 1 ADDRESS SELECTION	
Setting	JP1
í 3F8	Pins 1 & 2 closed
2F8	Pins 3 & 4 closed
3E8	Pins 5 & 6 closed
2E8	Pins 7 & 8 closed
3F0	Pins 9 & 10 closed
3E0	Pins 11 & 12 closed
2E0	Pins 13 & 14 closed
260	Pins 15 & 16 closed
Disabled	Open

SERIAL PORT 2 ADDRESS SELECTION	
Setting	JP4
3F8	Pins 1 & 2 closed
í 2F8	Pins 3 & 4 closed
3E8	Pins 5 & 6 closed
2E8	Pins 7 & 8 closed
3F0	Pins 9 & 10 closed
3E0	Pins 11 & 12 closed
2E0	Pins 13 & 14 closed
260	Pins 15 & 16 closed
Disabled	Open

SERIAL PORT 1 INTERRUPT SELECTION	
IRQ	JP2
í 3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed
9	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
Disabled	Open

Continued on next page...

DOLPHIN PERIPHERALS, LLC.
FASTISA-4077

... continued from previous page

SERIAL PORT 2 INTERRUPT SELECTION	
IRQ	JP5
3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed
9	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
Disabled	Open

SERIAL PORT 1 CLOCK SPEED SELECTION	
Speed	JP3
1.8432MHz	Pins 1 & 2 closed
3.6864MHz	Pins 3 & 4 closed
7.3728MHz	Pins 5 & 6 closed

SERIAL PORT 2 CLOCK SPEED SELECTION	
Speed	JP6
1.8432MHz	Pins 1 & 2 closed
3.6864MHz	Pins 3 & 4 closed
7.3728MHz	Pins 5 & 6 closed

PARALLEL PORT MODE SELECTION		
Setting	J1	J2
SPP	Pins 2 & 3 closed	Pins 2 & 3 closed
PS/2	Pins 1 & 2 closed	Pins 2 & 3 closed
EPP	Pins 2 & 3 closed	Pins 1 & 2 closed
ECP	Pins 1 & 2 closed	Pins 1 & 2 closed
Disabled	Open	Open

DMA CHANNEL SELECTION		
Channel	JP8	JP9
1	Pins 1 & 2 closed	Pins 1 & 2 closed
3	Pins 3 & 4 closed	Pins 3 & 4 closed
Disabled	Open	Open