


# QUICKPATH SYSTEMS, INC.

## FLEXPORT 22

Card Type	Parallel and Serial card
Chip Set	Startech
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (2 RS-232), parallel ports (2), 62-pin cable connector
Hard Drives supported	None
Floppy drives supported	None
Data Bus	16-bit ISA

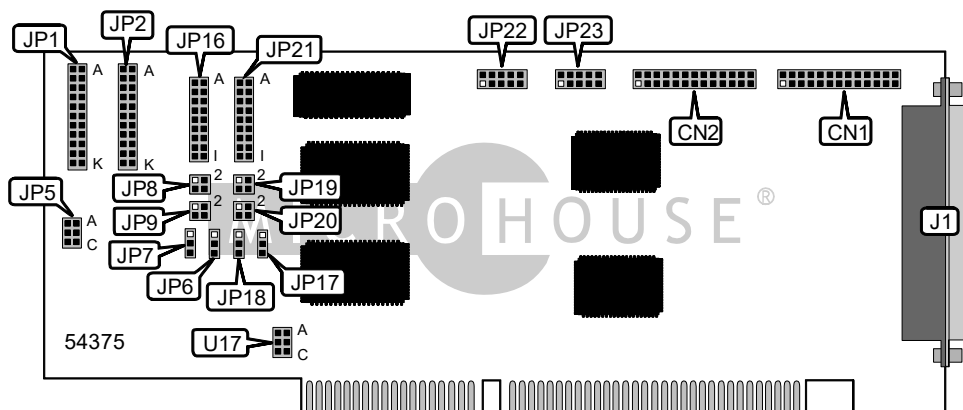

CONNECTIONS			
Function	Label	Function	Label
26-pin parallel port 1 - internal	CN1	10-pin serial port 1 - internal	J22
26-pin parallel port 2 - internal	CN2	10-pin serial port 2 - internal	J23
62-pin cable connector	J1		

PARALLEL PORT 1 MODE SELECTION			
Port Type	JP6		JP7
ECP/EPP	Pins 2 & 3 closed		Pins 2 & 3 closed
EPP	Pins 1 & 2 closed		Pins 2 & 3 closed
BPP/SPP	Pins 1 & 2 closed		Pins 1 & 2 closed
ECP	Pins 2 & 3 closed		Pins 1 & 2 closed
SPP	Pins 1 & 2 closed		Pins 1 & 2 closed

PARALLEL PORT 2 MODE SELECTION			
Port Type	JP17		JP18
ECP/EPP	Pins 2 & 3 closed		Pins 2 & 3 closed
EPP	Pins 1 & 2 closed		Pins 2 & 3 closed
BPP/SPP	Pins 1 & 2 closed		Pins 1 & 2 closed

Continued on next page . . .

# QUICKPATH SYSTEMS, INC.

## FLEXPORT 22

... continued from previous page

PARALLEL PORT 1 DMA CHANNEL SELECTION		
Channel	JP8	JP9
1	Pins 1 & 2, 3 & 4 closed	Open
3	Open	Pins 1 & 2, 3 & 4 closed

PARALLEL PORT 2 DMA CHANNEL SELECTION		
Channel	JP19	JP20
1	Pins 1 & 2, 3 & 4 closed	Open
3	Open	Pins 1 & 2, 3 & 4 closed

PARALLEL PORT ADDRESS SELECTION				
Parallel Port 1	Parallel Port 2	U17/A	U17/B	U17/C
LPT1 (378h)	LPT2 (278h)	Closed	Closed	Open
LPT1 (378h)	Disabled	Closed	Open	Open
Disabled	LPT2 (278h)	Open	Closed	Open
Disabled	Disabled	Open	Open	Closed

SERIAL PORT ADDRESS SELECTION				
Serial Port 1	Serial Port 2	JP5/A	JP5/B	JP5/C
3E8h	2E8h	Closed	Closed	Closed
3F8h	2F8h	Closed	Closed	Open
3F8h	3E8h	Closed	Open	Closed
3E8h	2E0h	Closed	Open	Open
100h	500h	Open	Closed	Closed
180h	580h	Open	Closed	Open
290h	690h	Open	Open	Closed
Disabled	Disabled	Open	Open	Open

SERIAL PORT 1 INTERRUPT SELECTION						
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F
IRQ3	Closed	Open	Open	Open	Open	Open
IRQ4	Open	Closed	Open	Open	Open	Open
IRQ5	Open	Open	Closed	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open
IRQ10	Open	Open	Open	Open	Open	Closed

SERIAL PORT 1 INTERRUPT SELECTION (CONT.)					
IRQ	JP1/G	JP1/H	JP1/I	JP1/J	JP1/K
IRQ11	Closed	Open	Open	Open	Open
IRQ12	Open	Closed	Open	Open	Open
IRQ14	Open	Open	Closed	Open	Open
IRQ15	Open	Open	Open	Closed	Open
Disabled	Open	Open	Open	Open	Closed

Continued on next page . . .

QUICKPATH SYSTEMS, INC.  
FLEXPORT 22

... continued from previous page

SERIAL PORT 2 INTERRUPT SELECTION						
IRQ	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F
IRQ3	Closed	Open	Open	Open	Open	Open
IRQ4	Open	Closed	Open	Open	Open	Open
IRQ5	Open	Open	Closed	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open
IRQ9	Open	Open	Open	Open	Closed	Open
IRQ10	Open	Open	Open	Open	Open	Closed

SERIAL PORT 2 INTERRUPT SELECTION (CONT.)					
IRQ	JP2/G	JP2/H	JP2/I	JP2/J	JP2/K
IRQ11	Closed	Open	Open	Open	Open
IRQ12	Open	Closed	Open	Open	Open
IRQ14	Open	Open	Closed	Open	Open
IRQ15	Open	Open	Open	Closed	Open
Disabled	Open	Open	Open	Open	Closed

[illegible][illegible]