


Chapter 5: Jumper Settings

OLICOM, INC.

O C - 2 1 7 3

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	AUI Transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

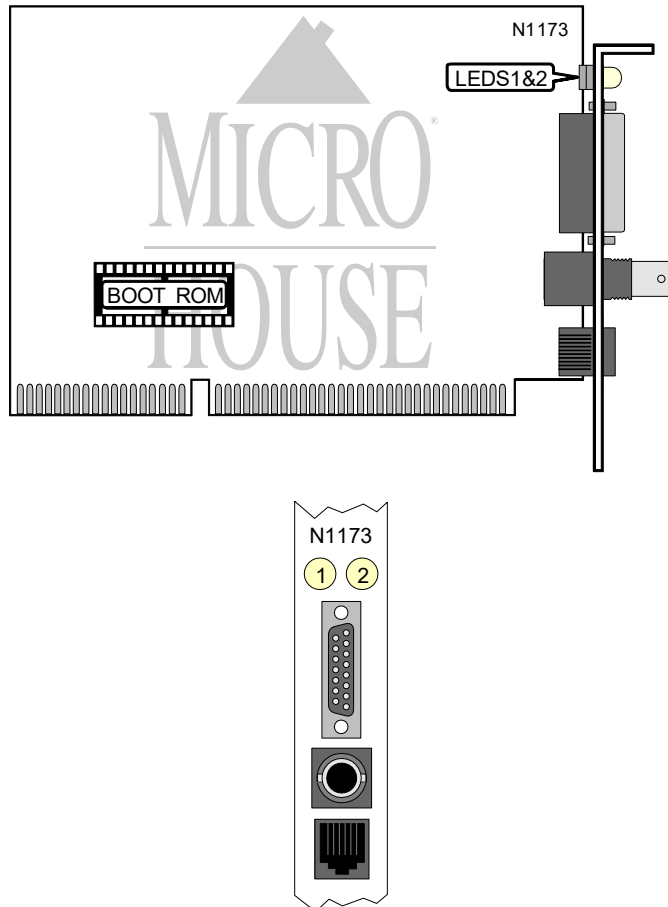

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
OLICOM INTERNATIONAL
O C - 2 1 7 3

. . . continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Network activity is detected
LED1	Yellow	Off	Network activity is not detected
LED2	Green	On	Network connection is good
LED2	Green	Off	Network connection is broken