


Chapter 5: Jumper Settings
TRENDWARE INTERNATIONAL INC.
T E - 1 6 T

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

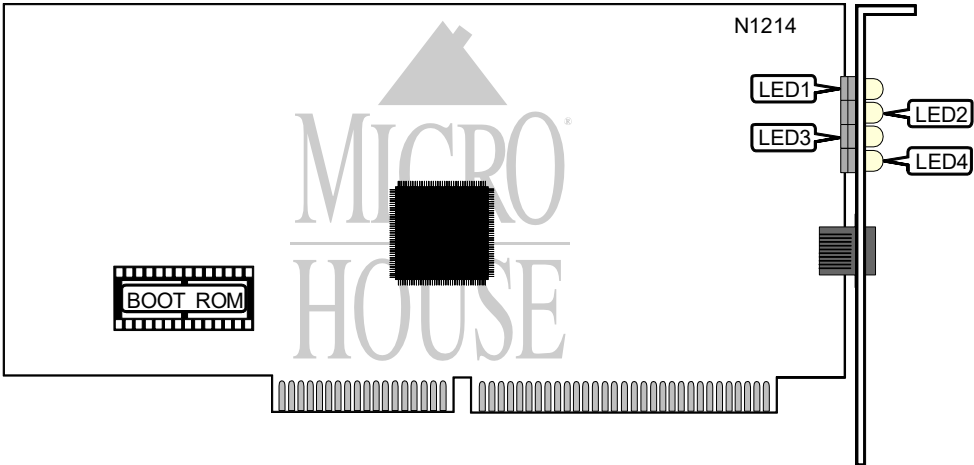

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Power on
LED1	Blinking	Data is being transmitted
LED1	Off	Power off
LED2	On	Network connection is good
LED2	Blinking	Data is being received
LED2	Off	Network connection broken
LED3	On	Network collision has been detected
LED3	Off	Network collision has not been detected
LED4	Blinking	Jabber has been detected on network
LED4	Off	Jabber has not been detected on network